



Catalogue
FOOD SERVICE
Chapter
DISHWASHING

Specific model
WUP-503 S 230V1N50Hz

19109551

01/04/2025

DENOMINATION:

Front loading dishwasher concept plus range for 500x500 basket with rinse pump and smart softener.

DESCRIPTION :

INTERFACE

- 2.8" backlit colour (TFT) liquid crystal display.
- Colour-coded status indicators.
- Display of operating parameters, such as tank and boiler temperature or cycle time.
- Indicators of tank and boiler heater operation.
- Self-diagnosis and error signalling.
- Timer function to be able to schedule the machine to switch on or off at a specific time.
- Power-saving mode (stand-by): Reduction of power consumption when the machine is not in operation.
- User-selectable programmes according to equipment use (glass, crockery and bar) and machine-specific programmes.
- Technical menu (via password):
 - View of all the inputs of the electronics and act on the outputs to facilitate the quick detection of problems.
 - Modification of operating parameters, such as heating temperatures, washing and rinsing times, etc.
- Membrane keypad with 5 buttons.


PROGRAMMES:

- Programmes for crockery- as standard:
 - Light: 90s (2,3 l/cycle, Wash T^a: 60°C, Rinse T^a: 85°C)
 - Standard: 120s (2,6 l/cycle, Wash T^a: 60°C, Rinse T^a: 85°C)
 - Intensive: 180s (3 l/cycle, Wash T^a: 60°C, Rinse T^a: 85°C)
 - Cutlery: 300s (3 l/cycle, Wash T^a: 65°C, Rinse T^a: 85°C)
- Additional programmes:
 - Programmes for glass
 - Programmes for bar

CONSTRUCTION DETAILS

- Sides of the washing chamber in partial double-skin

DIMENSIONS



X Width	576 mm	X Gross width	660 mm
Y Depth	605 mm	Y Gross depth	745 mm
Z Height	835 mm	Z Gross height	1030 mm
Net Weight	61,0 kg	Gross Weight	79,0 kg
Net volume	0,291 m3	Gross volume	0,506 m3

ELECTRICITY TECHNICAL SPECIFICATIONS

Electric power	3,480 kW
Voltage	220-240V
Phases	1N
Electric frequency	50Hz
Amperage (A)	15,13
Engine power	0,68 kW
Heating power	2,80 kW

MULTIPOWER

CONNECTION	RATED POWER (kW)	RATED CURRENT (A)	BOILER (kW)	TANK (kW)	
230V, 1N~	3,48 kW	15,13 A	2,8 kW	2,8 kW	ALT
230V, 1N~	4,41 kW	19,19 A	3,73 kW	2,8 kW	ALT
400V, 3N~	6,28 kW	15,13 A	5,6 kW	2,8 kW	ALT
230V, 3~	6,28 kW	17,01 A	5,6 kW	2,8 kW	ALT



Catalogue
FOOD SERVICE
Chapter
DISHWASHING

Specific model
WUP-503 S 230V1N50Hz

19109551

01/04/2025

- Stamped tank with slope for a complete drainage.
- Stamped basket guides.
- Upper and lower wash and rinse arms.
- Door:
 - Soundproofed and heat-resistant double-skin door.
 - Magnetic micro switch to stop the cycle in case of accidental opening of the door.
- Triple in stages filtering system:
 - Double pump suction filter that blocks lighter dirt, protecting the wash pump. It has a blue indicator on the overflow or filter depending on the model, to indicate that it is part of the "colour identification" concept.
 - Composite tank surface filters as standard, retain coarse dirt. The filter can be easily removed without disassembling the wash and rinse arms.
- Insulation in boiler.
- Dual-flow wash pumps: one input and two outputs, one for each arm, without the need to split the flow to avoid power loss and reduce noise.
- Soft-start: The cycle starts slowly and gradually increases to maximum speed to prevent light items such as glassware and crockery from falling out.
- Wash/rinse arms. Duo-KLIP:
 - A combined wash and rinse arm at the same level, made of composite material, preventing the two arms from getting in each other's way.
 - Low friction and very light arm that allows all the power supplied by the pump to be used for washing dishes and not for rotating the arm.
 - Washing and rinsing orifices designed with specific geometry to reach the most inaccessible places. They spray water precisely, achieving 10% lower water consumption, reducing electricity and chemical consumption and therefore helping to minimize operating costs.
 - The clip-on snap-on coupling makes it easy to assemble and disassemble for cleaning.
- Rinse pump:
 - Rinse even at low mains pressure (1 bar). Water is drawn from the boiler through a booster pump and sent to the rinse nozzles of the machine ensuring optimum and constant pressure. This system, being independent of mains pressure, thanks to the presence of the "Air Break", leads to lower water consumption and therefore lower energy consumption.
 - The temperature of the water in the boiler is constant throughout the rinse, as this water has not been mixed with cold mains water during the refilling phase.
 - The "Air Break" system prevents backflow into the water supply system of non-potable water contaminated with rinse products, detergents and food waste. Type A nonreturn device in compliance with EN 1717.
 - Accurate rinse aid dosing with a constant water flow.
- Thermostop: Starts the rinse when the rinse temperature required for a hygienic wash result and correct drying of the dishes has been reached. The rinse cycle will be extended to a maximum time of ten minutes if the rinse temperature setpoint is not reached.
- Thermostatic filling: Speeds up the machine set-up time as the tank is filled with water previously heated in the boiler, which is more powerful. Only available for models with rinse pump.
- Smart softener (S):
 - For best washing results and to protect the machine, with an integrated softener. It saves space and provides continuous soft water. This allows the detergent and rinse aid to work to their full effect and considerably reduces limescale deposits in the machine.
 - The user can easily refill the tank and a sensor warns when the salt tank needs to be refilled

WATER TECHNICAL SPECIFICATIONS

Pressure	H2O: 100-400kPa (1-4bar)
Maximum Temperature	Water Inlet Max Temp:60°C

CONNECTIONS TECHNICAL SPECIFICATIONS

Single-phase 230V wiring	3G 1,5MM2 - 16A
Water inlet diameter	3/4"
Drain 1 diameter	25MM

OTHERS

IPX	IPX3
-----	------

TECHNICAL FEATURES

Height glasses	340
Diameter plates	385
Max.theor.product.(baskets/h)	40
Tank capacity	20 L
Tank heater power	2,80 kW
Washing pump power	0,68 kW
Boiler capacity	7 L
Rinsing pump power	0,130 kW
Boiler heater power	5,60 kW
Type of heating (Alt./Sim.)	Alternate





Catalogue
FOOD SERVICE
Chapter
DISHWASHING

Specific model
WUP-503 S 230V1N50Hz

19109551

01/04/2025

- Smart resin regeneration:
 - * Integrated softener that provides continuous soft water. This allows the detergent and rinse aid to work to their full effect and considerably reduces limescale deposits in the machine.
 - * It performs the regeneration fully automatically and invisibly for the customer.
 - * Water quality is always constant.
- Sensorisation (Z) including:
 - Chemical dosing control (DA).
 - Control of low chemical level by means of probes (L), available as an accessory, with warning on the control panel.
 - Peristaltic rinse aid dosing as standard.
 - Gravity drainage.

POSSIBLE OPTIONS :

- Drain pump
- Detergent dispenser
- Connectivity
- Double skin
- Glass rod basket
- Stainless steel wash and rinse arms

STANDARD OPTIONS :

- Sensorisation

POSSIBLE ACCESSORIES :

- BASKETS FOR DISHWASHERS
- BASKETS FOR GLASSES
- ACCESSORIES DISHWASHING
- STANDS
- VARIOUS KITS

SUPPLIED ACCESSORIES:

- 19000484 Glass basket, 500x500x110 mm. 1
- 19000487 Basket for 16-18 plates, 500x500x110 mm. 1
- 19000792 Cutlery basket for 15 pieces of cutlery, 105x105x130 mm. 1






Catalogue
FOOD SERVICE
Chapter
DISHWASHING

Specific model
WUP-503 S 230V1N50Hz

19109551

01/04/2025

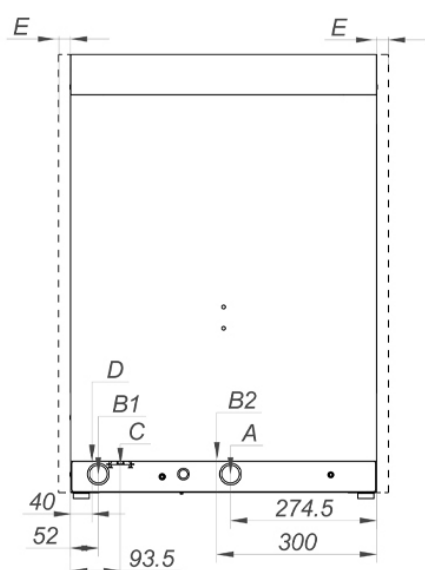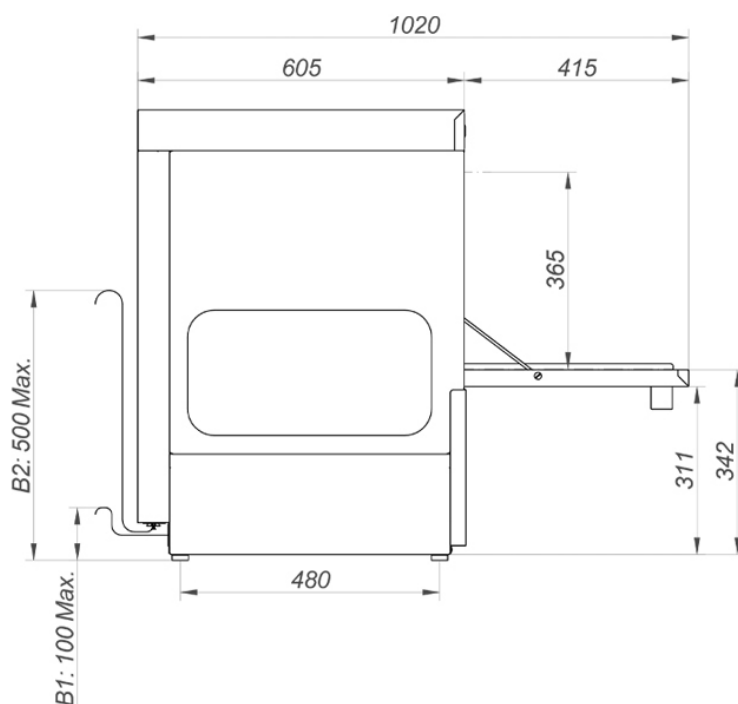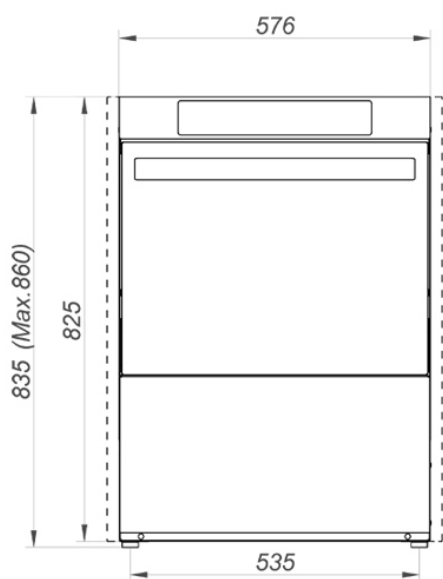

A: ENTRADA DE AGUA G3/4"
B1: DESAGÜE Ø25 L=2000 mm
B2: DESAGÜE CON BOMBA Ø17 L=1875mm
C: ALIMENTACIÓN ELÉCTRICA
D: ETHERNET
E: DOBLE PARED L=10mm

A: WATER INLET G3/4"
B1: DRAIN Ø25 L=2000 mm
B2: DRAINAGE PUMP Ø17 L=1875mm
C: ELECTRICAL CONNECTION
D: ETHERNET
E: DOUBLE SKIN L=10mm

A: ARRIVÉE D'EAU G3/4"
B1: VIDANGE Ø25 L=2000 mm
B2: POMPE À VIDANGE Ø17 L= 1875mm
C: CONNEXION ÉLECTRIQUE
D: ETHERNET
E: DOUBLE MUR L=10mm