



Catalogue
FOOD SERVICE
Chapter
REFRIGERATION

Specific model
CU-11F 230V 1N 50Hz

19089527

17/07/2024

The photo may show the standard model and not the configured one

DENOMINATION:

Fish refrigerated upright EN60x40, single body with 1 door.

DESCRIPTION :

- Interior and exterior built-in with food grade stainless steel for intensive professional applications.
- 50 mm thickness, CFC-free, high-density (40 kg/m³) polyurethane insulation, injected under high pressure.
- Constructed with a rail system placed in the front and back of the upright with 20 grid level position and 60mm distance among them.
- Intuitive, digital display for electronic control with energy saving function to ensure an optimal control of storing products.
- Stainless steel doors with ergonomic, full-length, robust, perfectly integrated handle. that ensures practical opening and avoids dust and dirt collection.
- Removable pull-out/push-in magnetic door gasket to keep maximum hygiene and maintain the insulating properties.
- Hinged doors with automatic return for a perfect closing that minimize temperature gain. Doors have a 120° dwell position and close automatically at less than 90°.
- Pivotal panel with better access to control that facilitates service, thus enlarging the useful life of the equipment.
- Automatic evaporation of defrost water.
- Internally designed forced draft cooling system with low consumption electronic components to guarantee optimal equipment efficiency and performance.
- Optimal air circulation system that guarantees a balanced and constant distribution throughout the equipment, so that the temperature remains uniform. It helps preserve food for longer.
- Height-adjustable stainless steel legs. Height of the legs can be adjusted individually (130 mm - 200 mm) to enable convenient cleaning.
- Low energy consumption LED lighting horizontally located in the interior of compartment.
- Stamped edge interiors, for easier cleaning operations to reduce potential dirt traps with a built-in drainage to get rid of waste liquid inside units.
- Removable and height adjustable 600x400x120 baskets with a maximum loading capacity of up to 40Kg.
- Equipped with 7 600x400x120 PVC baskets with a stainless steel manufactured perforated bottom and 7 sets of guiding support.
- Defrost by a heating element to remove ice accumulated in the evaporator.

POSSIBLE OPTIONS :

- 60 Hz
- Stainless Backing
- Wheels Kit (Factory Assembly)
- Door frame resistance
- Locks
- Opposite Opening
- Pedal
- Remote group

POSSIBLE ACCESSORIES :

- ACCESSORIES FOR REFRIGERATION

DIMENSIONS

X Width	760 mm	X Gross width	840 mm
Y Depth	729 mm	Y Gross depth	800 mm
Z Height	2006 mm	Z Gross height	2025 mm
Net Weight	163,0 kg	Gross Weight	171,0 kg
Net volume	1,111 m ³	Gross volume	1,361 m ³



ELECTRICITY TECHNICAL SPECIFICATIONS

Electric power	0,268 kW
Voltage	230V
Phases	1N
Electric frequency	50Hz
Amperage (A)	1,47A

COLD TECHNICAL SPECIFICATIONS

Temperature	-2 -4 °C
Climate class	4
Refrigeration power	0,369 kW
GWP	3
Cooling gas load	114,000 g
Gross internal volume	574 L
Noise level	53,00 dB
Condensation system	Vent.

CONNECTIONS TECHNICAL SPECIFICATIONS

Single-phase 230V wiring	2X1+T-2A
--------------------------	----------

OTHERS

Number of doors	1
-----------------	---





Catalogue
FOOD SERVICE
Chapter
REFRIGERATION

Specific model
CU-11F 230V 1N 50Hz

19089527

17/07/2024

The photo may show the standard model and not the configured one

SUPPLIED ACCESSORIES:

- 19097758 Stainless steel tray with perforated bottom for pastry upright. 7
- 19097771 Plastic tray for fish upright. 7





Catalogue
FOOD SERVICE
Chapter
REFRIGERATION

Specific model
CU-11F 230V 1N 50Hz

19089527

17/07/2024

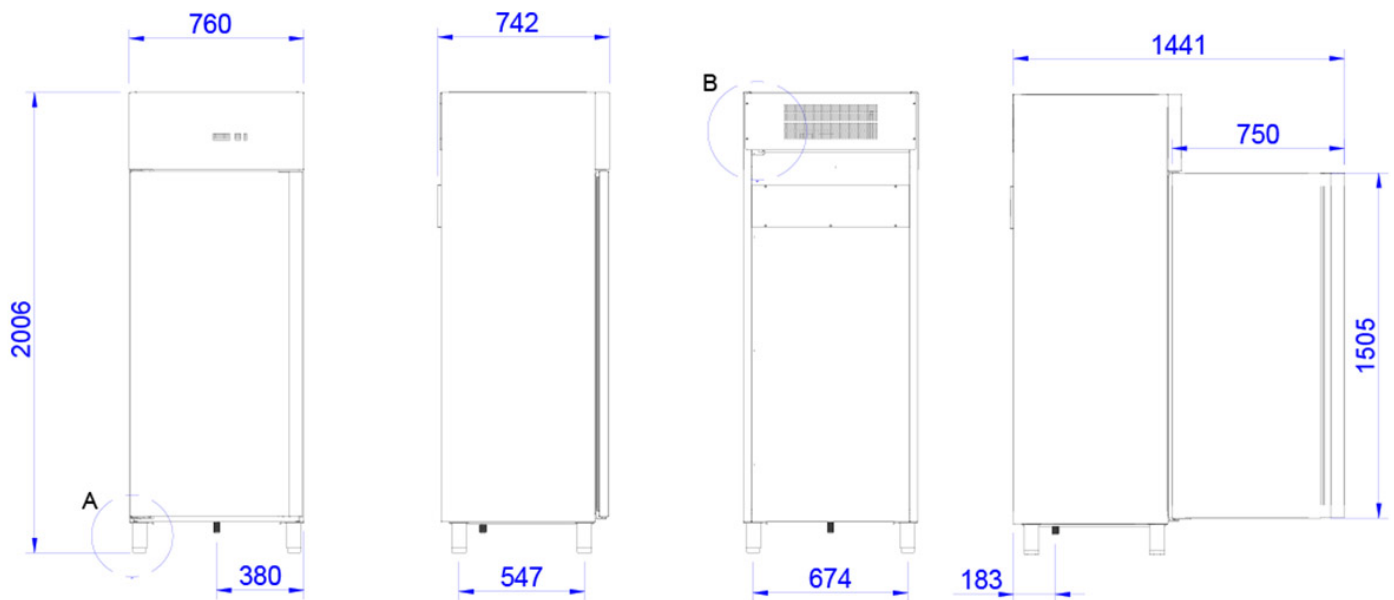

132 < X < 192

