



**Catalogue**  
**FOOD SERVICE**  
**Chapter**  
**REFRIGERATION**

**Specific model**  
ACN-3G 230V 1N 50Hz

19089533

18/07/2024

The photo may show the standard model and not the configured one

**DENOMINATION:**

Advance gastronorm GN 1/1 700 depth freezing counter with 3 doors.

**DESCRIPTION :**

- Interior and exterior completely manufactured in AISI-304 stainless steel.
- 60 mm thickness, CFC-free, high-density (40 kg/m<sup>3</sup>) polyurethane insulation, injected under high pressure.
- 30 mm stainless steel built in and polyurethane insulated working top with 100 mm high splash-back, preventing spillage behind the counter.
- Intuitive, large digital display for electronic control with energy saving function to ensure an optimal control of storing products.
- 10 HACCP alarms capacity which are store when high temperature variation and devices power failure
- Removable pull-out/push-in magnetic door gasket to keep maximum hygiene and maintain the insulating properties.
- Hinged doors with automatic return for a perfect closing that minimize temperature gain. Doors have a 120° dwell position and close automatically at less than 90°.
- Pivotal front panel with easy access for service access and ventilation grid design allowing machine to be embedded without penalizing performance.
- Internally designed forced draft cooling system with low consumption electronic components to guarantee optimal equipment efficiency and performance.
- Optimal air circulation system that guarantees a balanced and constant distribution throughout the equipment, so that the temperature remains uniform. It helps preserve food for longer.
- Height-adjustable stainless steel legs. Height of the legs can be adjusted individually (130 mm - 200 mm) to enable convenient cleaning.
- Automatic evaporation of defrost water.
- Rounded edge interiors, easier cleaning operations to reduce potential dirt traps with a built-in drainage to get rid of waste liquid inside units.
- Removable and height adjustable epoxy coated GN 1/1 grids with a maximum loading capacity of up to 40 kg.
- Equipment with 1 GN 1/1 grids and height adjustable 2 sets of tray slides per each full door.
- Stainless steel doors with ergonomic, full-length, robust, perfectly integrated handle that ensures practical opening of the drawers and avoids dust and dirt collection.
- Defrost by hot gas coming from the compressor is used to remove ice accumulated in the evaporator reducing defrost time and achieving even less energy consumption.

**POSSIBLE OPTIONS :**

- 60 Hz
- Stainless Backing
- Wheels Kit (Factory Assembly)
- Granite countertop
- Connectivity
- Locks
- Left group
- Without breastplate
- Without Countertop
- Panoramic aperture

**DIMENSIONS**



X Width	1790 mm	X Gross width	1910 mm
Y Depth	700 mm	Y Gross depth	825 mm
Z Height	850 mm	Z Gross height	1000 mm
Net Weight	132,0 kg	Gross Weight	139,0 kg
Net volume	1,071 m <sup>3</sup>	Gross volume	1,576 m <sup>3</sup>

**ELECTRICITY TECHNICAL SPECIFICATIONS**

Electric power	0,316 kW
Voltage	230V
Phases	1N
Electric frequency	50Hz
Amperage (A)	2,5 A

**COLD TECHNICAL SPECIFICATIONS**

Temperature	-18 -22 °C
Climate class	4
Refrigeration power	0,364 kW
GWP	3
Cooling gas load	82,000 g
Gross internal volume	446 L
Noise level	56,00 dB
Condensation system	Vent.
Model Type	Counter Cabinet
Annual elec. consumption	2662,00 kWh
Power consumption 24h	7,29 kWh
Frozen net.vol	279 L
IEE	66
Clasif. Energy efficiency	D

**CONNECTIONS TECHNICAL SPECIFICATIONS**

Single-phase 230V wiring	2X1+T-3A
--------------------------	----------

**OTHERS**

Number of doors	3
-----------------	---





**Catalogue**  
FOOD SERVICE  
**Chapter**  
REFRIGERATION

**Specific model**  
ACN-3G 230V 1N 50Hz

19089533

18/07/2024

The photo may show the standard model and not the configured one

- Remote group

**STANDARD OPTIONS :**

- Door frame resistance

**POSSIBLE ACCESSORIES :**

- ACCESSORIES FOR REFRIGERATION
- GASTRONORM GRIDS

**SUPPLIED ACCESSORIES:**

- 19015961 Tray support guides for fish compartments of dual snack upright. 12
- 19097778 GN 1/1 epoxi grid for GN 1/1 refrigerated upright. 3




**Catalogue**  
**FOOD SERVICE**  
**Chapter**  
**REFRIGERATION**

**Specific model**  
ACN-3G 230V 1N 50Hz

19089533

18/07/2024

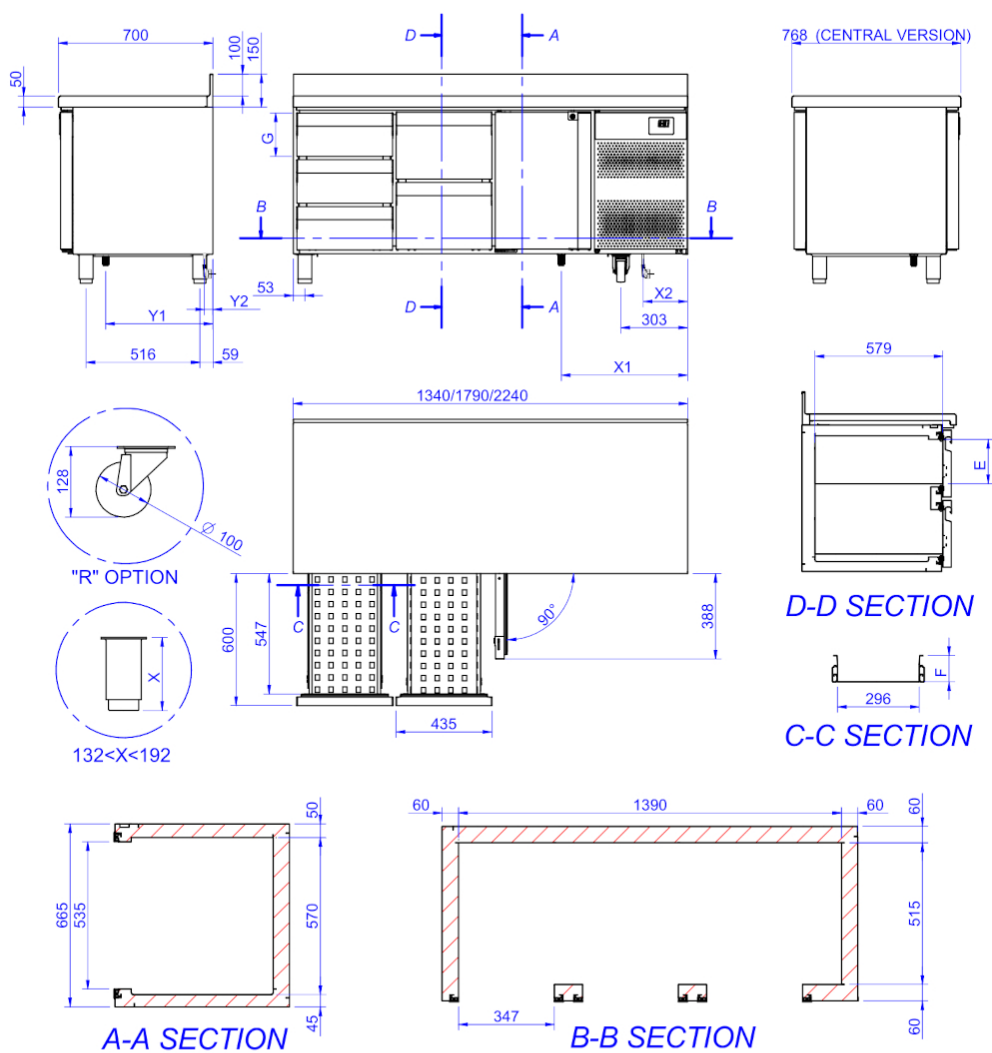

DRAIN	X1 (mm)	573
	Y1 (mm)	486
ELECT.	X2 (mm)	202
	Y2 (mm)	38

DRAWER	(mm)		
	E	F	G
1/3	105	80	197
1/2	201	166	304
2/3	308	275	410