



**Catalogue**  
**FOOD SERVICE**  
**Chapter**  
**REFRIGERATION**

**Specific model**  
**CCN-3S 230V 1N 50Hz**

19089636

19/07/2024

The photo may show the standard model and not the configured one

**DENOMINATION:**

Snack 600 depth freezing counter with 3 doors.

**DESCRIPTION :**

- Interior constructed with AISI-304 stainless steel exterior in food grade stainless steel.
- 50 mm thickness, CFC-free, high-density (40 kg/m<sup>3</sup>) polyurethane insulation, injected under high pressure.
- Heavy-duty stainless-steel working top with 100mm high splash-back, preventing spillage behind the counter.
- Intuitive, digital display for electronic control with energy saving function to ensure an optimal control of storing products.
- Removable pull-out/push-in magnetic door gasket to keep maximum hygiene and maintain the insulating properties.
- Hinged doors with automatic return for a perfect closing that minimize temperature gain. Doors have a 120° dwell position and close automatically at less than 90°.
- Pivotal front panel with easy access for service access and ventilation grid design allowing machine to be embedded without penalizing performance.
- Internally designed forced draft cooling system with low consumption electronic components to guarantee optimal equipment efficiency and performance
- Optimal air circulation system that guarantees a balanced and constant distribution throughout the equipment, so that the temperature remains uniform. It helps preserve food for longer.
- Height-adjustable stainless steel legs. Height of the legs can be adjusted individually (130 mm - 200 mm) to enable convenient cleaning.
- Automatic evaporation of defrost water.
- Stamped edge interiors, easier cleaning operations to reduce potential dirt traps with a built-in drainage to get rid of waste liquid inside units.
- Removable and height adjustable epoxy coated grids with a maximum loading capacity of up to 40 kg.
- Equipped with 1 grid 405x460 mm in each edge door and 1 grid 405x525 in centered doors and height adjustable 2 sets of tray slides per each full door.
- Stainless steel doors with ergonomic, full-length, robust, perfectly integrated handle that ensures practical opening of the drawers and avoids dust and dirt collection.
- Defrost by a heating element to remove ice accumulated in the evaporator.


**POSSIBLE OPTIONS :**

- 60 Hz
- Stainless Backing
- Wheels Kit (Factory Assembly)
- Locks
- Left group
- Without breastplate
- Without Countertop
- Panoramic aperture

**STANDARD OPTIONS :**

- Door frame resistance

**DIMENSIONS**



X Width	2017 mm	X Gross width	2150 mm
Y Depth	600 mm	Y Gross depth	680 mm
Z Height	850 mm	Z Gross height	1000 mm
Net Weight	119,0 kg	Gross Weight	125,0 kg
Net volume	1,029 m <sup>3</sup>	Gross volume	1,462 m <sup>3</sup>

**ELECTRICITY TECHNICAL SPECIFICATIONS**

Electric power	0,329 kW
Voltage	230V
Phases	1N
Electric frequency	50Hz
Amperage (A)	2,3 A

**COLD TECHNICAL SPECIFICATIONS**

Temperature	-18 -22 °C
Climate class	4
Refrigeration power	0,364 kW
GWP	3
Cooling gas load	87,000 g
Gross internal volume	416 L
Noise level	56,00 dB
Condensation system	Vent.
Model Type	Counter Cabinet
Annual elec. consumption	2879,85 kWh
Power consumption 24h	7,89 kWh
Frozen net.vol	231 L
IEE	77
Clasif. Energy efficiency	E

**CONNECTIONS TECHNICAL SPECIFICATIONS**

Single-phase 230V wiring	2X1+T-4A
--------------------------	----------

**OTHERS**

Number of doors	3
-----------------	---





**Catalogue**  
FOOD SERVICE  
**Chapter**  
REFRIGERATION

**Specific model**  
CCN-3S 230V 1N 50Hz

19089636

19/07/2024

The photo may show the standard model and not the configured one

**POSSIBLE ACCESSORIES :**

- ACCESSORIES FOR REFRIGERATION

**SUPPLIED ACCESSORIES:**

- 19097775 Epoxi grid for snack counters, 405 mm x 525 mm. 1
- 19097777 Epoxi grid for snack counters, 405 mm x 460 mm. 2





**Catalogue**  
**FOOD SERVICE**  
**Chapter**  
**REFRIGERATION**


**Specific model**  
CCN-3S 230V 1N 50Hz

19089636

19/07/2024

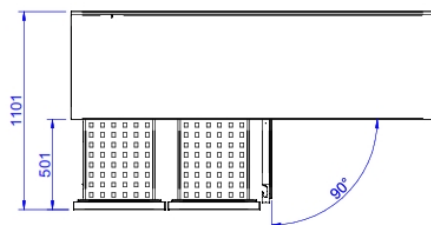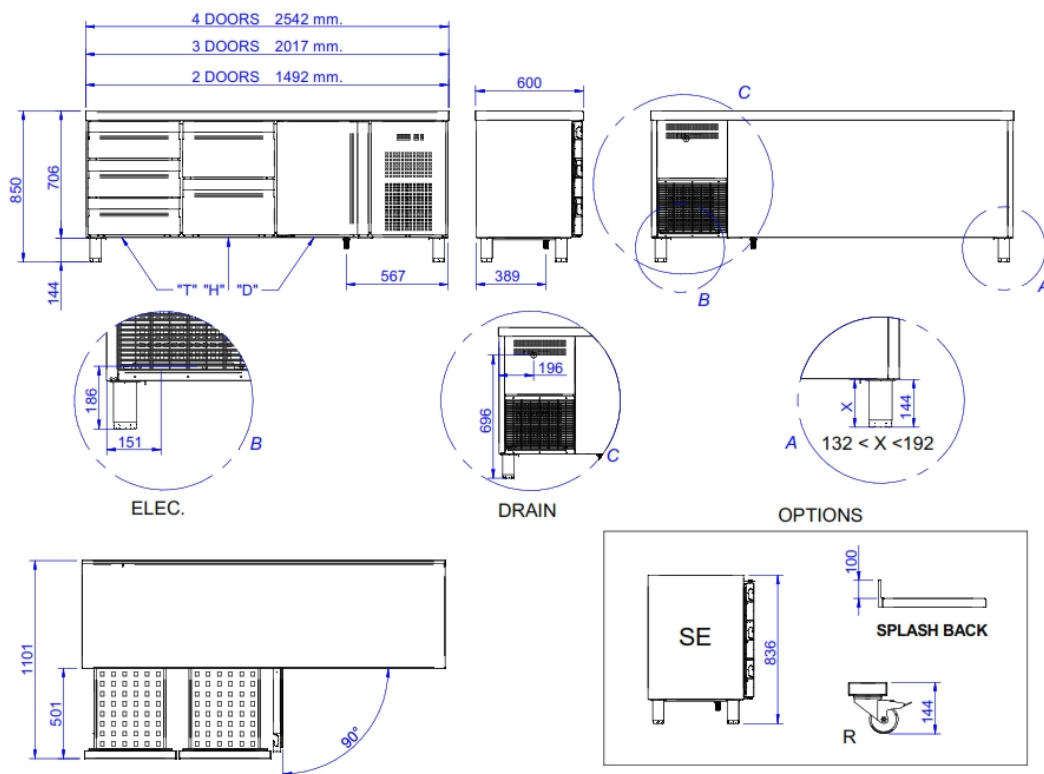

**GRILL FIXING DETAIL**



**DRAWER DIMENSIONS**

