



Catalogue
FOOD SERVICE
Chapter
REFRIGERATION

Specific model
CCP-2S/S 230V 1N 50Hz

19089662

19/07/2024

The photo may show the standard model and not the configured one

DENOMINATION:

Snack 600 depth refrigerated counter with sink with 2 doors.


DESCRIPTION :

- Interior constructed with AISI-304 stainless steel exterior in food grade stainless steel.
- 50 mm thickness, CFC-free, high-density (40 kg/m³) polyurethane insulation, injected under high pressure.
- Heavy-duty stainless-steel working top with 100mm high splash-back, preventing spillage behind the counter.
- Intuitive, digital display for electronic control with energy saving function to ensure an optimal control of storing products.
- Removable pull-out/push-in magnetic door gasket to keep maximum hygiene and maintain the insulating properties.
- Hinged doors with automatic return for a perfect closing that minimize temperature gain. Doors have a 120° dwell position and close automatically at less than 90°.
- Pivotal front panel with easy access for service access and ventilation grid design allowing machine to be embedded without penalizing performance.
- Internally designed forced draft cooling system with low consumption electronic components to guarantee optimal equipment efficiency and performance
- Optimal air circulation system that guarantees a balanced and constant distribution throughout the equipment, so that the temperature remains uniform. It helps preserve food for longer.
- Height-adjustable stainless steel legs. Height of the legs can be adjusted individually (130 mm - 200 mm) to enable convenient cleaning.
- Automatic evaporation of defrost water.
- Stamped edge interiors, easier cleaning operations to reduce potential dirt traps with a built-in drainage to get rid of waste liquid inside units.
- Removable and height adjustable epoxy coated grids with a maximum loading capacity of up to 40 kg.
- Equipped with 1 grid 405x460 mm in each edge door and 1 grid 405x525 in centered doors and height adjustable 2 sets of tray slides per each full door.
- Stainless steel doors with ergonomic, full-length, robust, perfectly integrated handle that ensures practical opening of the drawers and avoids dust and dirt collection.
- With 330x330x200 mm stamped bowl.
- Defrost by compressor stop.

POSSIBLE OPTIONS :

- 60 Hz
- Stainless Backing
- Wheels Kit (Factory Assembly)
- Door frame resistance
- Drawers [1/2] unit
- Locks
- Left group
- Without breastplate
- Panoramic aperture
- Drawers [1/3] unit
- Drawers [1/3 + 2/3] unit

DIMENSIONS



X Width	1492 mm	X Gross width	1600 mm
Y Depth	600 mm	Y Gross depth	680 mm
Z Height	850 mm	Z Gross height	1000 mm
Net Weight	94,0 kg	Gross Weight	98,0 kg
Net volume	0,761 m ³	Gross volume	1,088 m ³

ELECTRICITY TECHNICAL SPECIFICATIONS

Electric power	0,203 kW
Voltage	230V
Phases	1N
Electric frequency	50Hz
Amperage (A)	0,96 A

COLD TECHNICAL SPECIFICATIONS

Temperature	0 +8 °C
Climate class	4
Refrigeration power	0,361 kW
GWP	3
Cooling gas load	64,000 g
Gross internal volume	268 L
Noise level	54,00 dB
Condensation system	Vent.
Model Type	Counter Cabinet
Annual elec. consumption	956,30 kWh
Power consumption 24h	2,62 kWh
Refrigeration net.vol	153 L
IEE	44
Clasif. Energy efficiency	C

CONNECTIONS TECHNICAL SPECIFICATIONS

Single-phase 230V wiring	2X1+T-2A
Water inlet diameter	1/2"
Drain 1 diameter	30X25

OTHERS

Number of doors	2
-----------------	---





Catalogue
FOOD SERVICE
Chapter
REFRIGERATION

Specific model
CCP-2S/S 230V 1N 50Hz

19089662

19/07/2024

The photo may show the standard model and not the configured one

POSSIBLE ACCESSORIES :

- ACCESSORIES FOR REFRIGERATION

SUPPLIED ACCESSORIES:

- 19097777 Epoxi grid for snack counters, 405 mm x 460 mm. 2





Catalogue
FOOD SERVICE
Chapter
REFRIGERATION


Specific model
CCP-2S/S 230V 1N 50Hz

19089662

19/07/2024

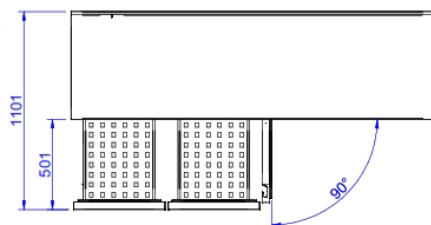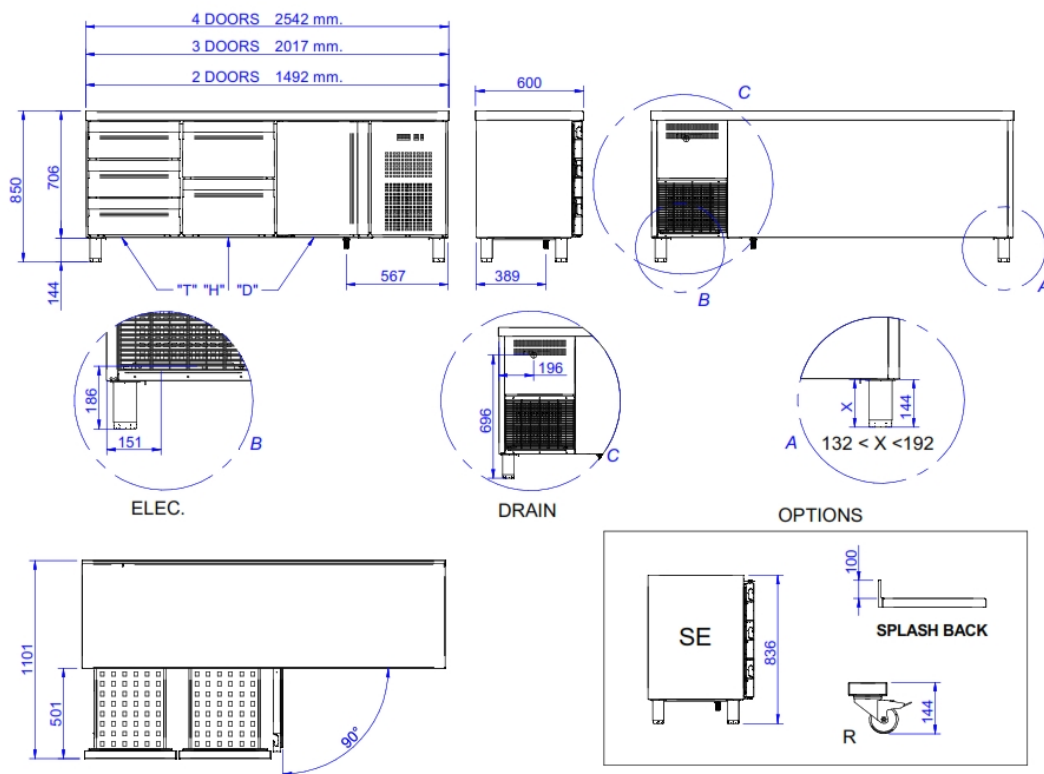

GRILL FIXING DETAIL



DRAWER DIMENSIONS

