




DESCRIPTION

	Capacity: 4 x 60x40 - GN 1/1
	Trays insertion: Crosswise
	Dimensions: 865 x 735 x H 565 mm
	Control panel: Programmable
	Indicative quantity of meals: 48
	Cooking chamber heating: Electric
	Steam generation: Direct system

COOKING MODES AND FUNCTIONING

	Convection mode	Temperature range between 50 °C and 270 °C
	Convection with steam	Adjustable steam quantity
	Autoreverse	Automatic reversal of fan rotation
	Automatic programs	99 Automatic programs (3 phases + preheating)

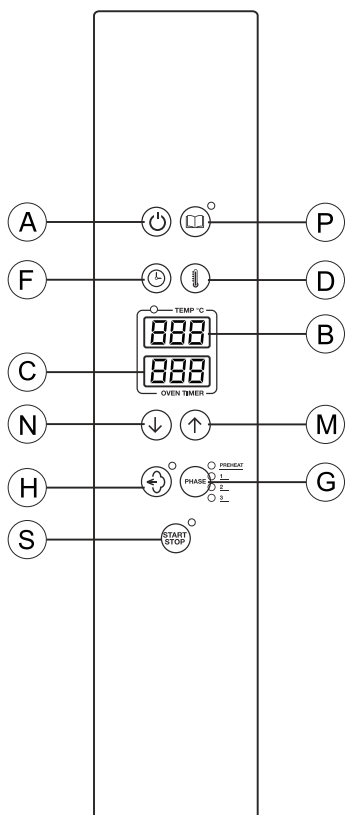

CONTROL PANEL DESCRIPTION

A	ON/OFF button
B	Temperature display
C	Time display
D	Cooking chamber temperature selection
F	Time selection
G	Program's phases
H	Steam quantity selection
M	Increase value button
N	Reduce value button
P	Automatic programs
S	Start/stop button

MANUFACTURING FEATURES

- Heating system located on the back side of the cooking chamber;
- Waterproof cooking chamber in stainless steel AISI 304;
- Cooking chamber with external welding;
- External covering panels made of satin stainless steel AISI 430;
- Base chassis made of stainless steel AISI 430;
- Heating elements made of stainless steel Incoloy 800;
- Thermal insulation of the cooking chamber in ceramics fibre;
- Cooking chamber fans made of stainless steel;

OPTIONAL ACCESSORIES

Code	Description
DLE	Hand shower
SCR 11 NB8	Stand H 85 with shelf
CRGR 11 NB8	Tray slides kit

Code	Description

DIMENSIONS


	OVEN	PACKAGE
Width	865 mm	900 mm
Depth (with door handle)	745 mm	770 mm
Height	565 mm	755 mm
Weight/volume	65 kg/0.52 m ³	

POWER SUPPLY

Model	VS DP 004E
Power loading	6.5 kW
Cooking chamber power	6.0 kW
Power of the motors	n° 2 x 240 W
Max. power loading	6.5 kW
Voltage	380 - 415 V 3N ~ 50/60 Hz
Absorbed current	13,0 A
Feed cable section	n° 5 x 2.5 mm ²
Capacity	4 x 60x40 - GN 1/1
Pitch between the trays	75 mm

WATER SUPPLY

Water supply coupling	Ø ¾" gas
Water pressure	1.5 - 2.5 bar
Water hardness	4 - 12 °f 40 - 120 ppm
Water conductivity	50 e 2000 µS/cm
Chlorine concentr. Cl ₂	< 0.2 mg/litre
Chloride concentration	<150 mg/litre
Water drain coupling	Øe 40 mm

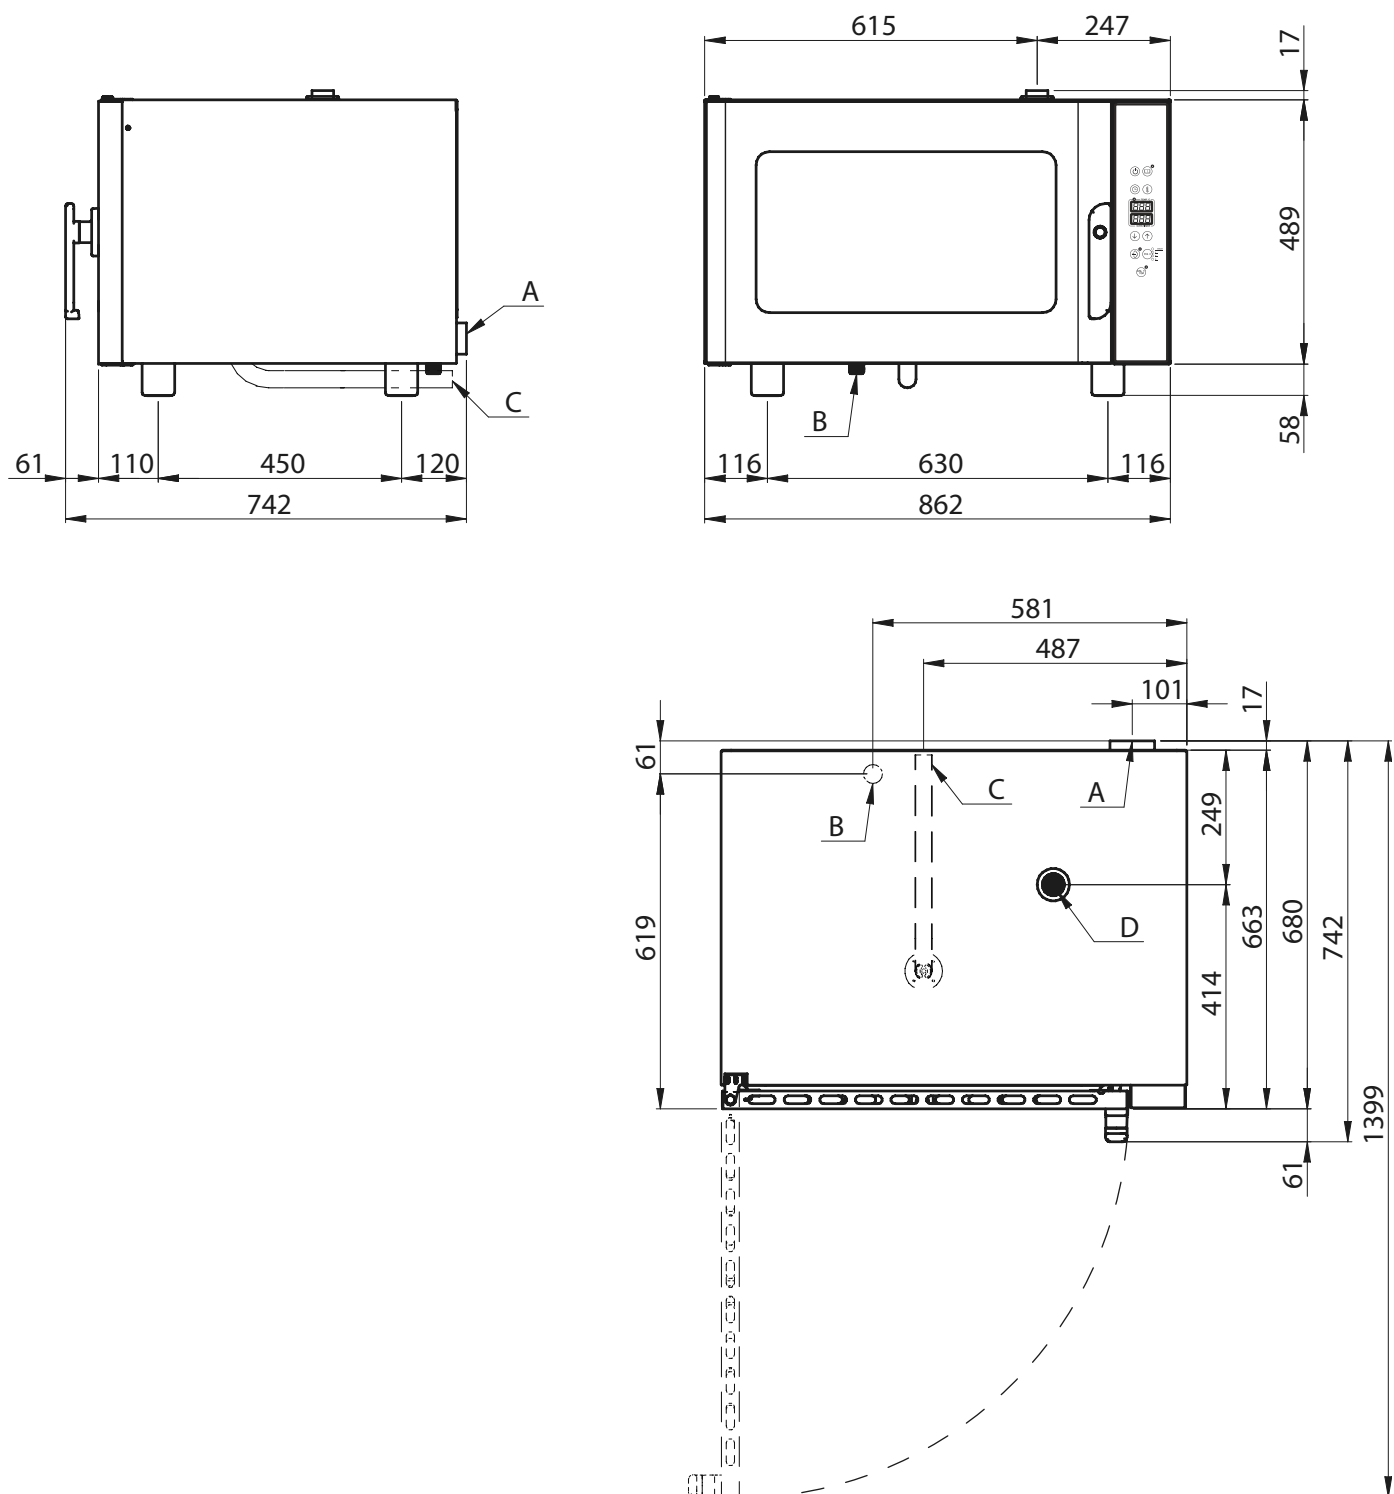

- A Electrical cables connection
- B Water inlet Ø 3/4" gas
- C Chamber drainage Øe 40 mm
- D Cooking chamber release valve