



Catalogue
FOOD SERVICE
Chapter
REFRIGERATION

Specific model
CPZC-2G GR BS 230V 1N 50Hz

19089681

05/07/2024

The photo may show the standard model and not the configured one

DENOMINATION:

700 mm depth professional compact pizza counter with granite worktop and 2 doors.

DESCRIPTION :

- Specially manufactured in high-quality stainless-steel for intensive professional applications, featuring a very robust design and perfect finishing. Ideal to be used as a pizza preparation counter.
- 50 mm thickness, CFC-free, high-density (40 kg/m³) polyurethane insulation, injected under high pressure.
- Heavy-duty 30mm granite working top with 88mm height splashback and a cutout to place 100 mm GN 1/6 bowls. 6 in CPZC-2G and 11 in CPZC-3G.
- Worktop ingredients vitrines are refrigerated by the air circulation of the cooling unit. Location of evaporator in the middle beam and the correct isolation of the worktop ensures an uniform cold distribution.
- Additional neutral compartment with 3 drawers EN 60x40 size.
- Intuitive, digital display for electronic control with energy saving function to ensure an optimal control of storing products.
- Stainless steel doors with ergonomic, full-length, robust, perfectly integrated handle that avoids dust and dirt collection.
- Removable pull-out/push-in magnetic door gasket to keep maximum hygiene and maintain the insulating properties.
- Hinged doors with automatic return for a perfect closing that minimize temperature gain. Doors have a 120° dwell position and close automatically at less than 90°.
- Pivotal front panel with easy access for service access and ventilation grid design allowing machine to be embedded without penalizing performance.
- Internally designed forced draft cooling system with low consumption electronic components to guarantee optimal equipment efficiency and performance.
- Optimal air circulation system that guarantees a balanced and constant distribution throughout the equipment, so that the temperature remains uniform. It helps preserve food for longer.
- Height-adjustable stainless steel legs. Height of the legs can be adjusted individually (130 mm - 200 mm) to enable convenient cleaning.
- Automatic evaporation of defrost water.
- Stamped edge interiors, easier cleaning operations to reduce potential dirt traps with a built-in drainage to get rid of waste liquid inside units.
- Removable and height adjustable epoxy coated EN60x40 grids with a maximum loading capacity of up to 40 kg.

POSSIBLE OPTIONS :


- 60 Hz
- Stainless Backing
- Door frame resistance
- Locks
- Panoramic aperture
- Remote group

STANDARD OPTIONS :

- Granite countertop

POSSIBLE ACCESSORIES :

DIMENSIONS



X Width	1590 mm	X Gross width	1705 mm
Y Depth	700 mm	Y Gross depth	815 mm
Z Height	880 mm	Z Gross height	1190 mm
Net Weight	134,0 kg	Gross Weight	140,0 kg
Net volume	0,979 m ³	Gross volume	1,654 m ³

ELECTRICITY TECHNICAL SPECIFICATIONS

Electric power	0,262 kW
Voltage	230V
Phases	1N
Electric frequency	50Hz
Amperage (A)	1,1A

COLD HORECA ECO LABEL

Temperature	0 +8 °C
Climate class	4
Refrigeration power	0,369 kW
Gas type	R-290
GWP	3
Cooling gas load	125,000 g
Gross internal volume	325 L
Noise level	54,00 dB
Condensation system	Vent.

CONNECTIONS TECHNICAL SPECIFICATIONS

Single-phase 230V wiring	2X1,5+T - 6 A
--------------------------	---------------

OTHERS

Number of doors	2
-----------------	---





Catalogue
FOOD SERVICE
Chapter
REFRIGERATION

Specific model
CPZC-2G GR BS 230V 1N 50Hz

19089681

05/07/2024

The photo may show the standard model and not the configured one

- ACCESSORIES FOR REFRIGERATION
- DISTRIBUTION

SUPPLIED ACCESSORIES:

- 19014778 Tray support guides for GN 2/1 double body upright. 2
- 19097776 EN60x40 epoxi grid for pastry upright. 2




Catalogue
FOOD SERVICE
Chapter
REFRIGERATION

Specific model
CPZC-2G GR BS 230V 1N 50Hz

19089681

05/07/2024

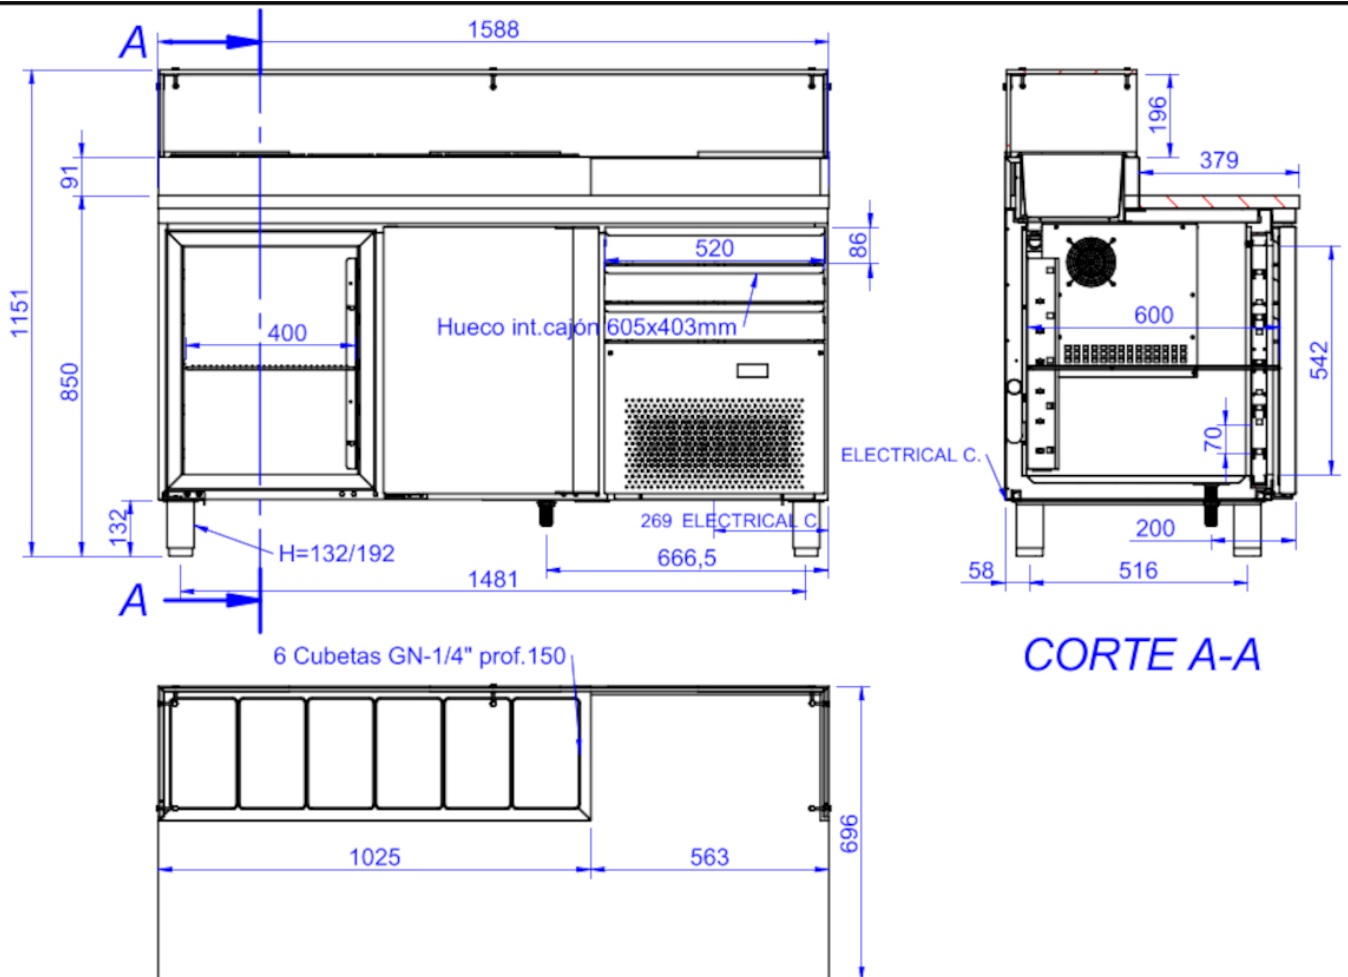

CORTE A-A