



Catalogue
FOOD SERVICE
Chapter
DISHWASHING

Specific model
WHP-503 S B 400V3N50Hz

19109457

01/04/2025

DENOMINATION:

Hood type dishwasher concept plus range for 500x500 basket with rinse pump, smart softener and drain pump.

DESCRIPTION :

INTERFACE

- 2.8" backlit colour (TFT) liquid crystal display.
- Colour-coded status indicators.
- Display of operating parameters, such as tank and boiler temperature or cycle time.
- Indicators of tank and boiler heater operation.
- Self-diagnosis and error signalling.
- Timer function to be able to schedule the machine to switch on or off at a specific time.
- Power-saving mode (stand-by): Reduction of power consumption when the machine is not in operation.
- User-selectable programmes according to equipment use (glass, crockery and bar) and machine-specific programmes.
- Technical menu (via password):
 - View of all the inputs of the electronics and act on the outputs to facilitate the quick detection of problems.
 - Modification of operating parameters, such as heating temperatures, washing and rinsing times, etc.
- Membrane keypad with 5 buttons.


PROGRAMMES:

- Programmes for crockery- as standard:
 - Light: 60s ((2,3 l/cycle, Wash T^a: 60°C, Rinse T^a: 85°C)
 - Standard: 90s (2,6 l/cycle, Wash T^a: 60°C, Rinse T^a: 85°C)
 - Intensive: 180s (3 l/cycle, Wash T^a: 60°C, Rinse T^a: 85°C)
 - Extended: 480s (3 l/cycle, Wash T^a: 60°C, Rinse T^a: 85°C)
 - Cutlery: 300s (3 l/cycle, Wash T^a: 65°C, Rinse T^a: 85°C)
- Additional programmes:
 - Programmes for glass
 - Programmes for bar

CONSTRUCTION DETAILS

- Single-skin hood, which slides smoothly on metal runners that reduce lifting effort and noise level.
- Fully stamped tank with no welds or sharp edges. The washing chamber is free of interior pipes, edges and holes where dirt can accumulate.
- Easy cleaning of internal parts without the need to remove the rack support. The support can be tilted upwards by 90°

DIMENSIONS



X Width	630 mm	X Gross width	765 mm
Y Depth	750 mm	Y Gross depth	905 mm
Z Height	1480 mm	Z Gross height	1610 mm
Net Weight	91,0 kg	Gross Weight	113,0 kg
Net volume	0,700 m3	Gross volume	1,115 m3

ELECTRICITY TECHNICAL SPECIFICATIONS

Electric power	14,250 kW
Voltage	380-415V
Phases	3N
Electric frequency	50Hz
Amperage (A)	22,83
Engine power	0,75 kW
Heating power	13,50 kW

MULTIPOWER

CONNECTION	RATED POWER (kW)	RATED CURRENT (A)	BOILER (kW)	TANK (kW)	
230V, 1N~	5,25 kW	22,83 A	4,5 kW	2,25 kW	ALT
230V, 1N~	6,75 kW	29,35 A	6 kW	3 kW	ALT
230V, 1N~	7,50 kW	32,61 A	4,5 kW	2,25 kW	SIM
230V, 1N~	9,75 kW	42,39 A	6 kW	3 kW	SIM
400V, 3N~	9,75 kW	16,30 A	9 kW	4,5 kW	ALT
400V, 3N~	14,25 kW	22,83 A	9 kW	4,5 kW	SIM
230V, 3~	9,75 kW	25,85 A	9 kW	4,5 kW	ALT
230V, 3~	14,25 kW	37,15 A	9 kW	4,5 kW	SIM



Catalogue
FOOD SERVICE
Chapter
DISHWASHING

Specific model
WHP-503 S B 400V3N50Hz

19109457

01/04/2025

- The machine and its tables can be installed in a straight line or in a corner. In addition, it is possible to change the working direction left-right or right-left.
- Upper and lower wash and rinse arms.
- Magnetic micro switch to stop the cycle in case of accidental opening of the hood.
- Cycle start activated by hood down or manual (deactivated).
- Easy handling thanks to the surrounding handle on the hood.
- Double in stages filtering system:
 - Polypropylene pump suction filter that blocks the lightest dirt, protecting the washing pump.
 - Composite tank surface filters as standard, retain coarse dirt. The filter can be easily removed without disassembling the wash and rinse arms.
- Insulation in boiler.
- Dual-flow wash pumps: one input and two outputs, one for each arm, without the need to split the flow to avoid power loss and reduce noise.
- Soft-start: The cycle starts slowly and gradually increases to maximum speed to prevent light items such as glassware and crockery from falling out.
- Wash/rinse arms. Duo-KLIP:
 - A combined wash and rinse arm at the same level, made of composite material, preventing the two arms from getting in each other's way.
 - Low friction and very light arm that allows all the power supplied by the pump to be used for washing dishes and not for rotating the arm.
 - Washing and rinsing orifices designed with specific geometry to reach the most inaccessible places. They spray water precisely, achieving 10% lower water consumption, reducing electricity and chemical consumption and therefore helping to minimize operating costs.
 - The clip-on snap-on coupling makes it easy to assemble and disassemble for cleaning.
- Rinse pump:
 - Rinse even at low mains pressure (1 bar). Water is drawn from the boiler through a booster pump and sent to the rinse nozzles of the machine ensuring optimum and constant pressure. This system, being independent of mains pressure, thanks to the presence of the "Air Break", leads to lower water consumption and therefore lower energy consumption.
 - The temperature of the water in the boiler is constant throughout the rinse, as this water has not been mixed with cold mains water during the refilling phase.
 - The "Air Break" system prevents backflow into the water supply system of non-potable water contaminated with rinse products, detergents and food waste. Type A nonreturn device in compliance with EN 1717.
 - Accurate rinse aid dosing with a constant water flow.
- Thermostop: Starts the rinse when the rinse temperature required for a hygienic wash result and correct drying of the dishes has been reached. The rinse cycle will be extended to a maximum time of ten minutes if the rinse temperature setpoint is not reached.
- Thermostatic filling: Speeds up the machine set-up time as the tank is filled with water previously heated in the boiler, which is more powerful. Only available for models with rinse pump.
- Smart softener (S):
 - For best washing results and to protect the machine, with an integrated softener. It saves space and provides continuous soft water. This allows the detergent and rinse aid to work to their full effect and considerably reduces limescale deposits in the machine.
 - The user can easily refill the tank and a sensor warns when the salt tank needs to be refilled.
 - Smart resin regeneration:

WATER TECHNICAL SPECIFICATIONS

Pressure	H2O: 100-400kPa (1-4bar)
Maximum Temperature	Water Inlet Max Temp:60°C

CONNECTIONS TECHNICAL SPECIFICATIONS

Water inlet diameter	3/4"
Drain 1 diameter	17MM

OTHERS

IPX	IPx4
-----	------

TECHNICAL FEATURES

Height glasses	415
Diameter plates	450
Tray size	GN 1/1
Max.theor.product.(baskets/h)	60
Tank capacity	33 L
Tank heater power	4,50 kW
Washing pump power	0,75 kW
Drain pump power	0,10 kW
Boiler capacity	10 L
Rinsing pump power	0,130 kW
Boiler heater power	9,00 kW
Type of heating (Alt./Sim.)	Simultaneous





Catalogue
FOOD SERVICE
Chapter
DISHWASHING

Specific model
WHP-503 S B 400V3N50Hz

19109457

01/04/2025

- * Integrated softener that provides continuous soft water. This allows the detergent and rinse aid to work to their full effect and considerably reduces limescale deposits in the machine.
- * It performs the regeneration fully automatically and invisibly for the customer.
- * Water quality is always constant.
- Sensorisation (Z) including:
 - Chemical dosing control (DA).
 - Control of low chemical level by means of probes (L), available as an accessory, with warning on the control panel.
 - Peristaltic rinse aid dosing as standard.
 - Drain pump included (B).
- Volumetric rinse: the dirty wash water is partially drained before rinsing, which makes it possible:
 - Avoid useless waste of detergent by slower soiling of the water.
 - Reducing energy costs during the heating phase of the wash water by continuously regenerating the wash

POSSIBLE OPTIONS :

- Detergent dispenser
- Connectivity
- Double skin
- Glass rod basket
- Stainless steel surface filter
- Stainless steel wash and rinse arms

STANDARD OPTIONS :

- Drain pump
- Sensorisation

POSSIBLE ACCESSORIES :

- BASKETS FOR DISHWASHERS
- BASKETS FOR GLASSES
- TABLES FOR HOOD
- ACCESSORIES DISHWASHING
- ENTRY-EXIT TABLES
- VARIOUS KITS

SUPPLIED ACCESSORIES:

- 19000484 Glass basket, 500x500x110 mm. 1
- 19000487 Basket for 16-18 plates, 500x500x110 mm. 1
- 19000792 Cutlery basket for 15 pieces of cutlery, 105x105x130 mm. 1





Catalogue
FOOD SERVICE
Chapter
DISHWASHING

Specific model
WHP-503 S B 400V3N50Hz

19109457

01/04/2025

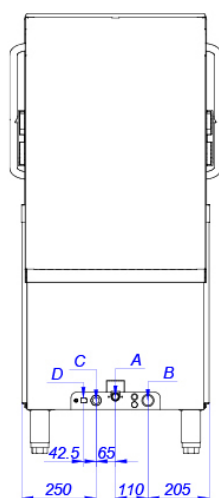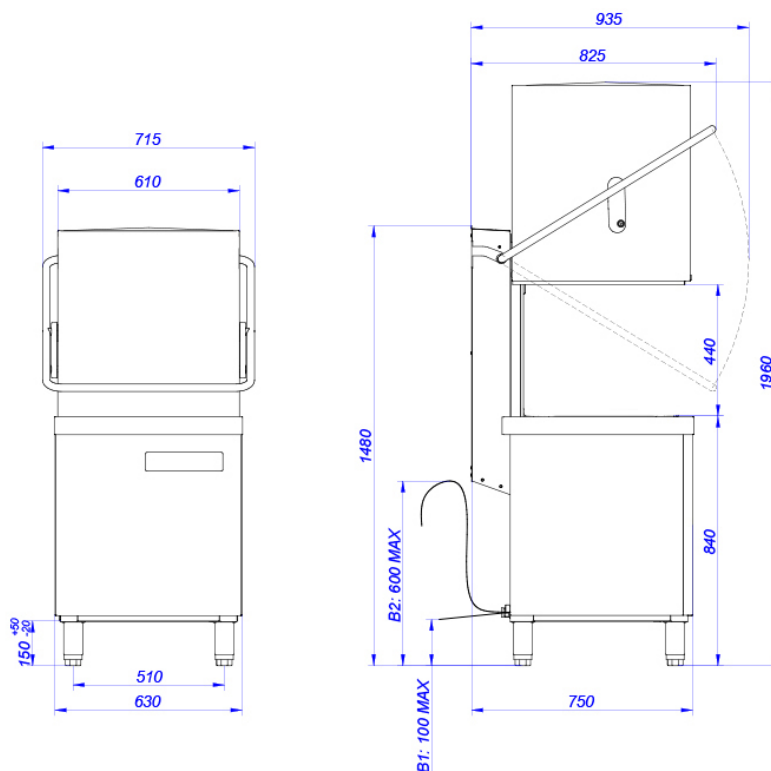

A: ENTRADA DE AGUA 3/4"
B1: DESAGÜE Ø25 L= 1500mm
B2: DESAGÜE CON BOMBIA Ø17 L= 3000mm
C: ALIMENTACIÓN ELÉCTRICA
D: ETHERNET

A: WATER INLET 3/4"
B1: DRAIN Ø25 L= 1500mm
B2: DRAINAGE PUMP Ø17 L= 3000mm
C: ELECTRICAL CONNECTION
D: ETHERNET

A: ARRIVÉE D'EAU 3/4"
B1: VIDANGE Ø25 L= 1500mm
B2: POMPE À VIDANGE Ø17 L= 3000mm
C: CONNEXION ÉLECTRIQUE
D: ETHERNET

