






Ice Cube

# CB 1565 HC



## Self-contained ice maker - Sprayer system Daily production up to 155 kg

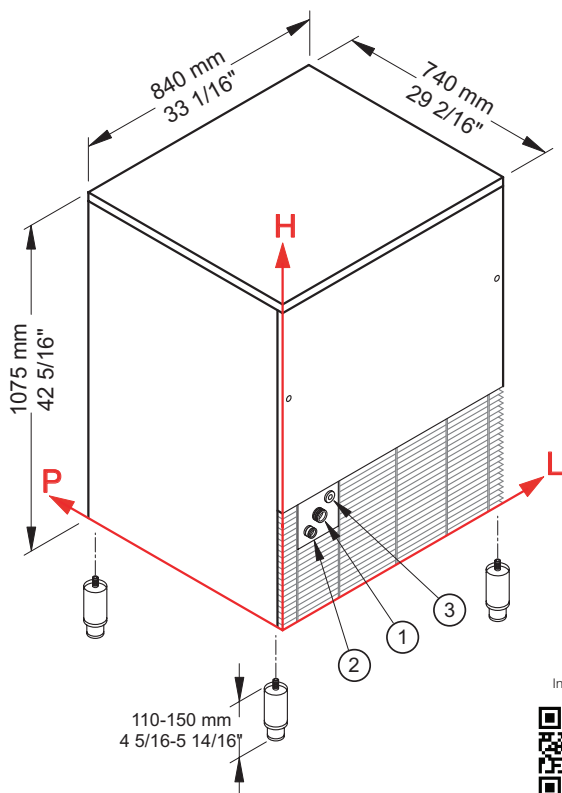

### ► Working conditions

- Location: Indoor

|                      | Min             | Max             |
|----------------------|-----------------|-----------------|
| Ambient temperature  | +10° C / +50° F | +43° C / 110° F |
| Water temperature    | +3° C / +37° F  | +32° C / +90° F |
| Voltage              | -10%            | +10%            |
| Water inlet pressure | 1bar (14 psi)   | 6bar (84 psi)   |

### ► Performances

|                 |       | Water temperature |         |        |         |        |         |
|-----------------|-------|-------------------|---------|--------|---------|--------|---------|
|                 |       | 7° C              | 45° F   | 15° C  | 60° F   | 21° C  | 70° F   |
|                 |       |                   |         |        |         |        |         |
| Air temperature | 10° C | 155 kg            |         |        |         |        |         |
|                 | 50° F |                   | 342 lbs |        |         |        |         |
|                 | 21° C |                   |         | 152 kg |         |        |         |
|                 | 70° F |                   |         |        | 335 lbs |        |         |
|                 | 32° C |                   |         |        |         | 138 kg |         |
|                 | 90° F |                   |         |        |         |        | 304 lbs |

### ► Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water in.: 141 mm / 5 9/16" - 290 mm / 11 7/16" - 3/4"      ② Water out.: 79 mm / 3 2/16" - 245 mm / 9 10/16" - 24 mm / 15/16"
- ③ Electrical connections: 186 mm / 7 5/16" - 326 mm / 12 13/16"

### ► Technical information

|                           |                                   |
|---------------------------|-----------------------------------|
| Production in 24h         | 152 kg / 335 lbs                  |
| Store capacity, up to     | 65 kg / 143 lbs                   |
| Cooling system            | A                                 |
| Kind of cube              | A-18g, C-33g, D-13g, E-42g, B-60g |
| Refrigerant               | R290                              |
| Standard voltage          | 220-240 V ~ 50 Hz                 |
| Average power consumption | 1280 W                            |
| Fuse                      | 16 A                              |
| Electrical consumption    | 20 kWh/100kg                      |

|                            |                                        |
|----------------------------|----------------------------------------|
| Water consumption          | A: 2 l/kg - 24 gal/100 lbs             |
| Sizes (L-P-H mm)           | 840 - 740 - 1075                       |
| (L-P-H in)                 | 33 1/16 - 29 2/16 - 42 5/16            |
| Sizes with pack (L-P-H mm) | 880 - 785 - 1245                       |
| (L-P-H in)                 | 34 10/16 - 30 14/16 - 49               |
| Net weight                 | 118 kg / 260 lbs                       |
| Gross weight               | 138 kg / 304 lbs                       |
| Finish                     | AISI 304 stainless steel, scotch brite |

All the technical information must be considered at the following conditions:

Sizes without feet  
Standard Cube (18 g)  
Ambient temperature +21° C  
Water temperature +15° C  
Electrical consumption at +32° C (standard voltage)  
Average power consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Rev. 01 - Issued july 2024



[www.bremaice.it](http://www.bremaice.it)  
[info@bremaicegroup.it](mailto:info@bremaicegroup.it)

We are Brema

