


CB 840 HC





Self-contained ice maker - Sprayer system Daily production up to 82 kg

Hotel Restaurant Fast food Bar Disco Fish market Supermarket Medical & SPA Industry



► Features & Plus

- Resistant and crystal cube
- AISI 304 SS Scotch Brite finish
- Tropical class +43°C
- · Adjustable Stainless Steel feet
- Removable and cleanable air filter
- Air or water cooling system
- Easy cleanable internal rounded surfaces
- HCFC-Free insulated storage
- RoHS Free
- · Disappearing insulated door
- Electromechanical operation
- ON-OFF rocker switch
- Standard and special voltages
- HFC Free
- Automatic Washing system






















► Position n°









Side openings for better ventilation




Double water inlet (W models only)



Plug-in electrical connection

► Available ice cube size



Cube 23 grams dimensions H 31.5 x L 32.5

▶ Prod. 24h

	Air te	emp.	Water temp.		kg	lbs	
•	10° C	50° F	7° C	45° F	82	181	ı
-	21° C	70° F	15° C	60° F	80	176	

2 Years Warranty subject to limitations

► Certifications available for this model























www.bremaice.it info@bremaicegroup.it






CB 840 HC



Self-contained ice maker - Sprayer system Daily production up to 82 kg

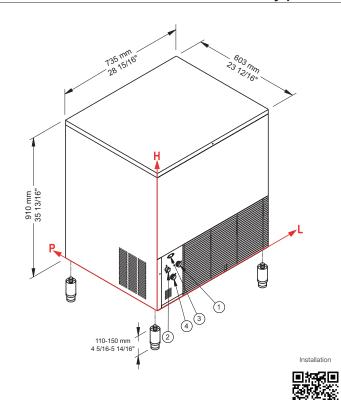

► Working conditions

• Location: Indoor

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

▶ Performances

		•	Water temperature					
		•	7° C	45° F	15° C	60° F	21° C	70° F
	Φ	10° C	82 kg					
	Air temperature	50° F		181 lbs				
		21° C			80 kg			
		70° F				176 lbs		
	i te	32° C					68 kg	
	⋖	90° F						150 lbs

▶ Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water in.: 135 mm / 5 5/16" 237 mm / 9 5/16" 3/4"

- ② Water out.: 62 mm / 2 7/16" 242 mm / 9 8/16" 24 mm / 15/16"
- (3) Electrical connections: 100 mm / 3 15/16" 312 mm / 12 5/16" (4) Cond. water in: 98 mm / 3 14/16" 177 mm / 6 15/16" 3/4"
- 4 Only for water cooling systems

► Technical information

Production in 24h	80 kg / 176 lbs			
Store capacity, up to	40 kg / 88 lbs			
Cooling system	A - W			
Kind of cube	Q-23g			
Refrigerant	R290			
Standard voltage	220-240 V ~ 50 Hz			
Average power consumption	700 W			
Fuse	10 A			
Electrical consumption	22 kWh/100kg			

Water consumption	A: 2,5 l/kg - 30 gal/100 lbs			
	W: 14 l/kg - 167,8 gal/100 lbs			
Sizes (L-P-H mm)	735 - 603 - 910			
(L-P-H in)	28 15/16 - 23 12/16 - 35 13/16			
Sizes with pack (L-P-H mm	780 - 640 - 1085			
(L-P-H in)	30 11/16 - 25 3/16 - 42 11/16			
Net weight	71 kg / 157 lbs			
Gross weight	83 kg / 183 lbs			
Finish A	AISI 304 stainless steel, scotch brite			

All the technical information must be considered at the following conditions:

Sizes without feet

Standard Cube (23 g)

Ambient temperature +21° C

Water temperature +15° C

Electrical consumption at +32° C (standard voltage)

Average power consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Rev. 01 - Issued july 2024



