




Ice Pebbles

TB 551 HC



Self-contained ice maker - Pebble system Daily production up to 66 kg

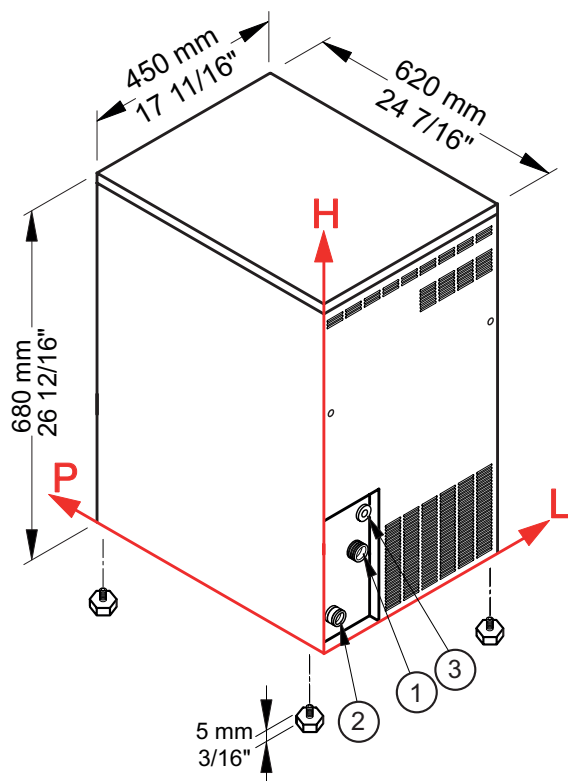

► Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

► Performances

		Water temperature					
		7° C	45° F	15° C	60° F	21° C	70° F
Air temperature	10° C	66 kg					
	50° F		146 lbs				
	21° C			57 kg			
	70° F				126 lbs		
	32° C					46 kg	
	90° F						101 lbs

► Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water in.: 106 mm / 4 3/16" - 135 mm / 5 5/16" - 3/4" ② Water out.: 55 mm / 2 3/16" - 55 mm / 2 3/16" - 24 mm / 15/16"
- ③ Electrical connections: 114 mm / 4 8/16" - 218 mm / 8 9/16"

► Technical information

Production in 24h 57 kg / 126 lbs

Store capacity, up to 10 kg / 22 lbs

Cooling system A - W

Approximate pebble size 8 x 16 x 7

Refrigerant R290

Standard voltage 220-240 V ~ 50 Hz

Average power consumption 410 W

Fuse 10 A

Electrical consumption 20 kWh/100kg

Water consumption A: 1 l/kg - 12,0 gal/100 lbs

W: 5 l/kg - 59,9 gal/100 lbs

Sizes (L-P-H mm) 450 - 620 - 680

(L-P-H in) 17 11/16 - 24 7/16 - 26 12/16

Sizes with pack (L-P-H mm) 505 - 675 - 850

(L-P-H in) 19 14/16 - 26 9/16 - 33 7/16

Net weight 56 kg / 123 lbs

Gross weight 64 kg / 141 lbs

Finish AISI 304 stainless steel, scotch brite

All the technical information must be considered at the following conditions:

Ambient temperature +21° C

Water temperature +15° C

Electrical consumption at +32° C (standard voltage)

Average power consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Rev. 01 - Issued july 2024



www.bremaice.it
info@bremaicegroup.it

We are Brema

