



Catalogue
FOOD SERVICE
Chapter
COOKING

Specific model B-G915 I LPG

19081680 11/11/2021

DENOMINATION:

Countertop LPG gas grill, stainless steel grill, 1 module and a half, 900 range.

DESCRIPTION:

- Surface tops manufactured in 2 mm thick AISI-304 stainless steel.
- Laser-cut joints, automatic welding and polishes. Screws hidden from view.
- Grills fitted with 130 mm high dismountable guard to avoid splashing, manufactured in stainless steel.
- High temperature enamelled cast iron flue protector.
- Access to the components from the front.
- Machines with IPX5 grade water protection.
- In the models with stainless steel grill, this is manufactured with sheets of AISI-304 in "V" shape to facilitate cleaning.
- -The grills reach a very high temperature (400 °C), meaning that the surface of the product seals rapidly, keeping the inside of the food much injeier
- Groups of high-efficiency tube burners, (a group of two burners for half-sized module models, two groups for a single module models).
- Independent control for each group of burners via a safety valve with a thermocouple.
- Burners turned on using Piezo electric ignition.
- The burners heat ceramic stones that sit on a supporting rack, so that they can then heat food on the grill.

POSSIBLE ACCESSORIES:

- STANDS 900
- ACCESSORIES KORE
- ACCESSORIES FOR CHARCOALS KORE
- TALL CHIMNEY KORE

SUPPLIED ACCESSORIES:

- 19058313 Scraper for charcoal with stainless steel grill Kore generation 1

DIMENSIONS



ELECTRICITY TECHNICAL SPECIFICATIONS

Voltage N/A

GAS TECHNICAL SPECIFICATIONS

 Gas type
 LPG

 Gas power
 33,00 kW

 Gas consumption
 2,560 kg/h

Regulated LPG G30/G31 28-30/37 mbar

NG G20/G25/G25.1 20/25/25 mbar
















Catalogue FOOD SERVICE


Capítulo **COOKING**


Modelo

B-G915 I LPG

19081680 11/11/2021

B-G915

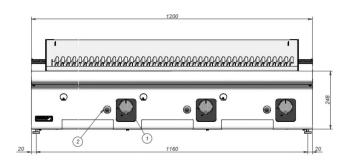



G - Entrada de Gas

Gas Inlet

1 – Grifo válvula de gas

Gas valve tap

2 - Pulsador de encendido

Piezoelectric ignitor









