

Catalogue
FOOD SERVICE
Chapter
COOKING

Specific model
C-G961 OP H LPG

1907551

05/11/2021


DENOMINATION:

Gas cookers with panoramic oven. LPG. 6 burners, high power. 900 range.

DESCRIPTION :

- "- Stamped surface tops, manufactured in 2 mm thick AISI-304 stainless steel.
- Laser-cut joints, automatic welding and polishes. Screws hidden from view.
- Hobs with dimensions 397 x 350 mm allowing the use of large pans and pots. The shortened distance between the central prongs, 75 mm, allows them to support pans with a very small diameter (8 cm). This also avoids the danger of small containers tipping over.
- The hobs are manufactured in RAAF enamelled cast iron (resistant to acid and alkali products, and to fire and high temperatures).
- Double crown burners and diffusers in nickel-plated cast iron, guaranteeing the even distribution of heat from the flame in the bottom of the pans, even large ones. This avoids the accumulation of heat at a single point and optimises the energy transfer of the product.
- Burners slot back in with no way of confusing their position.
- Low consumption pilots and thermocouples positioned within the body of the burner for greater protection.
- Gas conduction in flexible stainless steel tubes, making internal manipulation easier and facilitating any repair work.
- Controls set on a protective base with a system against water infiltration.
- High temperature enamelled cast iron flue protector aligned with the hobs, facilitating manoeuvrability and supporting larger containers, increasing useful surface area.
- Access to the components from the front.
- Machines with IPX5 grade water protection"
- "- Oven dimensions: 1,000 x 700 x 290 mm.
- User-friendly, with controls set on the upper panel for better ergonomics.
- Cooking chamber made entirely from stainless steel, making it easier to clean and ensuring a better level of hygiene.
- Tray inserted sideways, making it more user-friendly.
- Guide rails at three levels which offers different usage options.
- Guides rails with "U" shape to prevent the racks from tipping.
- Temperature controlled by thermostatic valve (125 – 310 °C)

DIMENSIONS



| | | | |
|------------|----------|----------------|----------|
| X Width | 1200 mm | X Gross width | 1240 mm |
| Y Depth | 930 mm | Y Gross depth | 1022 mm |
| Z Height | 850 mm | Z Gross height | 1255 mm |
| Net Weight | 248,0 kg | Gross Weight | 268,0 kg |
| Net volume | 0,950 m3 | Gross volume | 1,590 m3 |

ELECTRICITY TECHNICAL SPECIFICATIONS

| | |
|--------------------|-----|
| Voltage | N/A |
| Electric frequency | N/A |

GAS TECHNICAL SPECIFICATIONS

| | |
|-----------------|---|
| Gas type | LPG |
| Gas power | 64,20 kW |
| Gas consumption | 5,080 kg/h |
| Regulated | LPG G30/G31 28-30/37 mbar NG G20/G25/G25.1 20/25/25 mbar |

CONNECTIONS TECHNICAL SPECIFICATIONS

| | |
|----------------|-------|
| Gas diameter 1 | R3/4" |
|----------------|-------|



Catalogue
FOOD SERVICE

Capítulo
COOKING

Modelo
C-G961 OP H LPG

19075551

05/11/2021




- Stainless steel tube burner (two branches in OP version), with pilot flame, thermocouple, and Piezo electric ignition.
- Oven floor made from 6 mm cast iron, which guarantees better performance and even heat distribution.
- Fibre glass closing seal that improves the thermal efficiency of the oven and guarantees durability.
- Detachable oven door which makes repairs easier."

POSSIBLE ACCESSORIES :


- STANDS 900
- REFRIGERATED STANDS
- ACCESSORIES KORE
- COOKER ACCESSORIES KORE
- KORE WHEELS
- TALL CHIMNEY KORE



C-G941 & C-G941 H

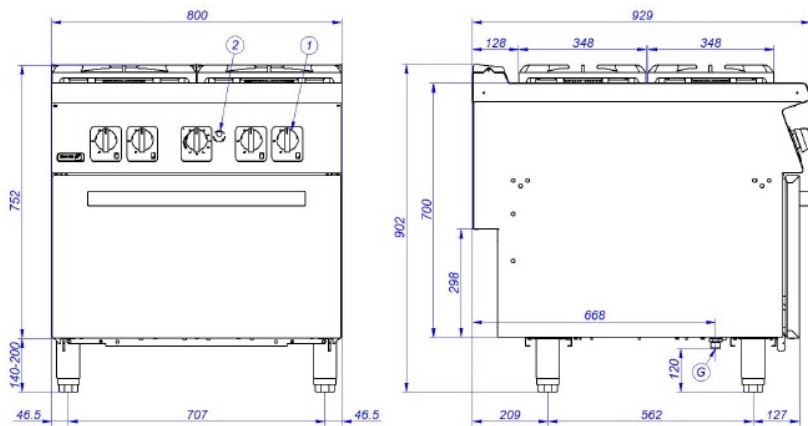

C-G961 & C-G961 H

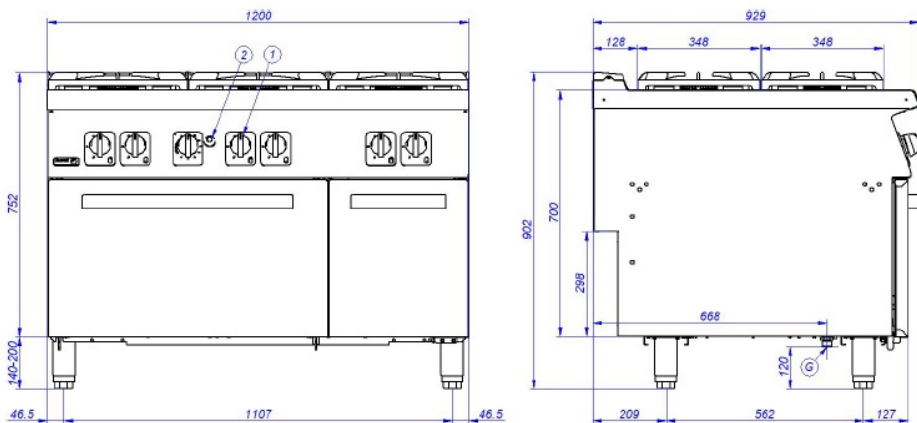

- G. Entrada de Gas
1. Válvula de gas
2. Pulsador tren de chispas
3. Mando H

- Gas Inlet
Gas valve
Piezoelectric ignitor
H control