



WASHING

HIGH SPIN WASHERS LOW AND MEDIUM CAPACITY LA-35C/45C TP2

CHARACTERISTICS

TP2

- User friendly and totally programmable 7".
- USB Connection. Online platform free of charge for programming, telemetry, data analysis... thanks to the IoT.
- Videos on display (ads, instructions).
- 37 languages.
- 8 dosing signals as standard.

G FACTOR

- High G-Factor: G-FACTOR 450.

EFFICIENCY

- Intelligent consumption.
- Optimal loading.
- Water Recovery tanks ready: KRS.
- Low water consumption.

VERSATILITY

- Make to order: customisation.
- OPL < > COIN.
- Electric < > Hot water.
- Drain valve < > Pump.
- Wet cleaning features.

CONNECTIVITY

- IoT - FagorKonnnect standard.
- Remote technical service.
- Management of laundries: OPL and COIN.
- Remote payment.

ERGONOMICS

- Biggest door diameters: Ø560.
- Easy opening/closing system for door lock.

MAINTENANCE

- Hinged control panel: easy and ergonomic access.
- Technical menu: statistics for technicians and maintenance with external console (with console option).

OTHERS


- Grey skinplate outer casing.
- Drum and tub in stainless steel AISI 304.
- Detergent dispenser with 4 compartments.
- Electronic control of imbalance with frequency control.
- LOADING AID system: water and rotation control.
- CB and WRAS approved product. Option ETL.
- High spin washers with suspended drum.

OPTIONS

- DQ-2 Dosing pump kit.
- Extra dosing pump DB-1.
- Double drain.
- Normally closed valve.
- Water FULL FLOW: recirculation of bath water.
- Levelling feet.
- Auto Weight: automatic weighing sensor system on feet (Includes kit with 6 extra dosing signals).
- Relay card with 6 extra dosing signals: up to 14 signals.
- Reversible door opening.
- Tropicalized model: protected board.
- Steam kit to transform an E or HW heated machine into steam version.
- Plinth to align loading height (door base at 850mm).
- Stainless steel AISI 304 outer casing.
- Stainless steel AISI 304 front panel (LA-35C).
- Maritime voltage for electric models: 440V III 50/60 Hz.
- No neutral.
- Voltage 230 V III 50/60 Hz.
- Coin/token kit.
- Auto unlock kit for the door.



| | U. | LA-35C TP2 | LA-45C TP2 | | |
|--|--------------------|-----------------|------------------------|-----------------|------------------------|
| DRUM | | | | | |
| Load capacity 1:9 / 1:10 | Kg | 39/35 | 47/42 | | |
| Volume | l | 350 | 450 | | |
| Diameter | mm | 860 | 860 | | |
| Depth | mm | 602 | 720 | | |
| GENERAL DETAILS | | | | | |
| Washing speed / Spining speed | r.p.m. | 42,5/966 | 42,5/966 | | |
| G Factor | - | 450 | 450 | | |
| Maximum force transmitted | KN | 7,36 ±2,45 | 7,36 ±2,45 | | |
| Frequency-dynamic force | Hz | 14,3 | 14,3 | | |
| Sound level | dB | <70 | <70 | | |
| Coin laundry version | - | Yes | No | | |
| Double drain | - | Opt. | Opt. | | |
| Weighing System / Tilting System | - | Opt./No | Opt./No | | |
| SLUIICE option | - | No | No | | |
| DOOR | | | | | |
| Height center door / Height door | mm | 885/540 | 885/540 | | |
| Diameter | mm | 560 | 560 | | |
| POWER | | | | | |
| Motor | kW | 6 | 6 | | |
| Electric heating power | kW | 21 | 21 | | |
| Total electric power (electric model) | kW | 22 | 22 | | |
| Total electric power (hw, steam model) | kW | 6 | 6 | | |
| CONNECTIONS | | ELECTRIC | STEAM/HOT WATER | ELECTRIC | STEAM/HOT WATER |
| Tension 230V - III + T | N° x mm2 / A | 3x16+T / 63A | 3x4+T / 32A | 3x16+T / 63A | 3x4+T / 32A |
| Tension 400V - III + N + T | N° x mm2 / A | 4x6+T / 40A | 4x1,5+T / 16A | 4x6+T / 40A | 4x1,5+T / 16A |
| Steam inlet (Steam mod.) | inch | 3/4" | | 3/4" | |
| Maximum steam consumption (Steam mod.) | Kg/h | 18 | | 18 | |
| Water inlet | inch | 3/4" | | 3/4" | |
| Water main pressure | Kg/cm ² | 2-4 | | 2-4 | |
| Maximum water consumption | Lit/h | 261,3* | | 335,9* | |
| Drain | mm/inch | 3" | | 3" | |
| Drainage capacity | Lit/min | 200 | | 200 | |
| DIMENSIONS / PACKING DIMENSIONS | | | | | |
| Net Width / Gross Width | mm | 1.095/1.205 | | 1.095/1.205 | |
| Net Depth / Gross Depth | mm | 1.184/1.330 | | 1.304/1.440 | |
| Net Height / Gross Height | mm | 1.730/1.850 | | 1.730/1.850 | |
| Net weight / Gross weight | Kg | 735/786 | | 747/853 | |
| Volume | m ³ | 2,7 | | 3,3 | |

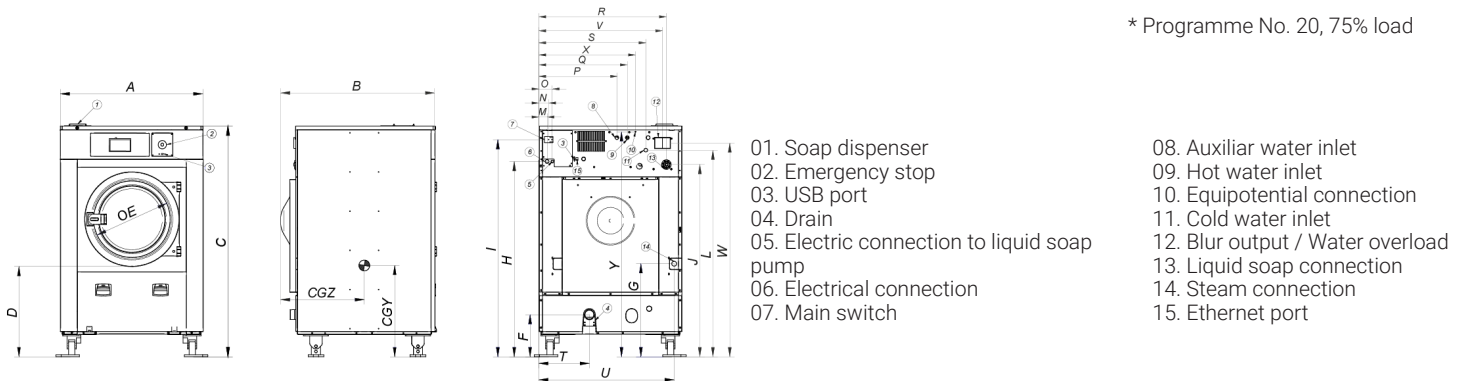

| | A | B | C | D | E | F | G | H | I | J | K | L | M | N | O | P | Q | R | S | T | U | V | W | X | Y | CGY | CGZ | |
|--------|----|-------|-------|-------|-----|-----|-----|-----|-------|-------|-------|-------|-------|----|----|-----|-----|-----|-----|-----|-----|-------|-----|-------|-----|-------|-----|-----|
| LA-35C | mm | 1.095 | 1.184 | 1.730 | 525 | 560 | 158 | 576 | 1.330 | 1.498 | 1.331 | 1.513 | 1.417 | 61 | 74 | 101 | 596 | 676 | 976 | 808 | 384 | 1.028 | 946 | 1.496 | 740 | 1.558 | 795 | 732 |
| LA-45C | mm | 1.095 | 1.304 | 1.730 | 525 | 560 | 158 | 576 | 1.330 | 1.498 | 1.331 | 1.513 | 1.417 | 61 | 74 | 101 | 596 | 676 | 976 | 808 | 384 | 1.028 | 946 | 1.496 | 740 | 1.558 | 795 | 800 |