



Catalogue
FOOD SERVICE
Chapter
REFRIGERATION

Specific model
RPS-2G D6 GR 230V 1N 50Hz

19104297

05/07/2024

The photo may show the standard model and not the configured one

DENOMINATION:

Compact pizza saladettes with granite worktop, 2 doors and 6 neutral drawers.

DESCRIPTION :

- Specially manufactured in high-quality stainless steel for intensive professional applications, featuring a very robust design and perfect finishing.
- Stainless steel drawers with perforated bottom plates and telescopic sliding guides, capable of complete retraction, to economize working surface. Other drawer configurations are also available upon request.
- Static evaporator, foamed in CFC free high-density polyurethane with 40 mm thickness. Interior without fin evaporator and smooth surfaces make an easy to clean compartment.
- Stainless steel doors with ergonomic, full-length, robust, perfectly integrated handle that avoids dust and dirt collection.
- Intuitive, digital display for electronic control with energy saving function to ensure an optimal control of storing products.
- Automatic evaporation of defrost water.
- Removable pull-out/push-in magnetic door gasket to keep maximum hygiene and maintain the insulating properties.
- Forced air cooling system.
- Removable front panel with front breathing design allowing machine to be embedded without penalizing performance.
- Removable and height adjustable epoxy coated GN 1/1 grids with a maximum loading capacity of up to 40 kg.
- Heavy-duty 30mm granite working top with side splash-back with 160 mm height.
- Available to fit ingredient vitrines range. Compatible models:
 - SP-2G 5 x GN 1/4
 - SPT-2G, 5 x GN 1/4

POSSIBLE OPTIONS :

- Drawers [1/2] unit
- Remote group

STANDARD OPTIONS :

- Granite countertop
- Panoramic aperture


POSSIBLE ACCESSORIES :

- ACCESSORIES FOR REFRIGERATION

SUPPLIED ACCESSORIES:

- 19014778 Tray support guides for GN 2/1 double body upright. 2
- 19104363 GN 1/1 epoxy grid for saladette counters. 2

DIMENSIONS



X Width	1358 mm	X Gross width	1410 mm
Y Depth	700 mm	Y Gross depth	760 mm
Z Height	1010 mm	Z Gross height	1110 mm
Net Weight	188,0 kg	Gross Weight	198,0 kg
Net volume	0,960 m3	Gross volume	1,189 m3

ELECTRICITY TECHNICAL SPECIFICATIONS

Electric power	0,245 kW
Voltage	230V
Phases	1N
Electric frequency	50Hz
Amperage (A)	1,4A

COLD HORECA ECO LABEL

Energy Efficiency Index	65,10 %
Temperature	+2 +8 °C
Climate class	4
Refrigeration power	0,369 kW
Gas type	R-290
GWP	3
Cooling gas load	80,000 g
Noise level	55,60 dB
Condensation system	Vent.
Model Type	Counter Cabinet
Annual elec. consumption	1403,06 kWh
Power consumption 24h	3,84 kWh
Refrigeration net.vol	143 L
Clasif. Energy efficiency	D

CONNECTIONS TECHNICAL SPECIFICATIONS

230 V three-phase wiring	3X1,0MM2
--------------------------	----------

OTHERS

Number of doors	2
-----------------	---






Catalogue
FOOD SERVICE
Chapter
REFRIGERATION

Specific model
RPS-2G D6 GR 230V 1N 50Hz

19104297

05/07/2024

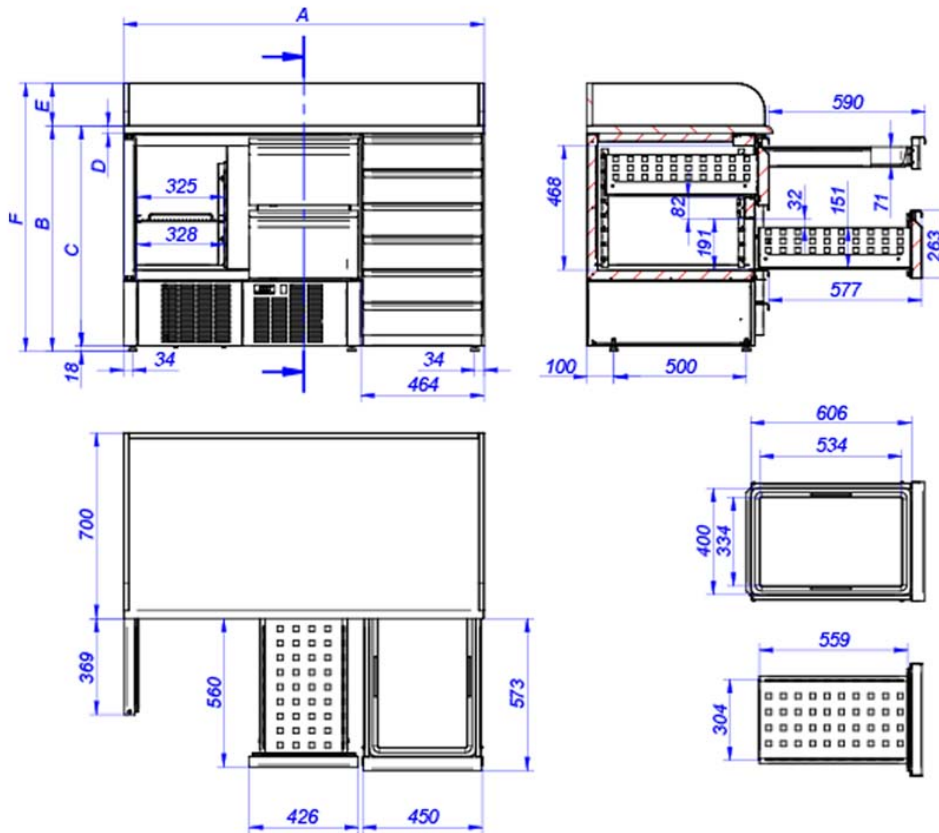

Model	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)				
RPS-2GP	894	840	822	20	21	861				
RPS-2G NS		850	832	30	-	850				
RPS-2G NS HH					290	1140				
RPS-2G NS DH							105	955		
RPS-2GS	1358	840	822	20	21	861				
RPS-2GZ					850	832	30	-	850	
RPS-3GP								290	1140	
RPS-3G NS										105
RPS-3G NS HHH					850	832	30	30	-	850
RPS-3G NS DHH									290	1140
RPS-3G NS DDH										
RPS-3GS									160	1010
RPS-3GZ										
RPS-3G GR									160	1010
RPS-3G GR D6	160	1010								