



Catalogue
FOOD SERVICE
Chapter
REFRIGERATION

Specific model
ACP-2G/C 230V 1N 50Hz

19089538

18/07/2024

The photo may show the standard model and not the configured one

DENOMINATION:

Advance gastronorm GN 1/1 700 depth central refrigerated counter with 2 doors.

DESCRIPTION :


- Interior and exterior completely manufactured in AISI-304 stainless steel.
- 60 mm thickness, CFC-free, high-density (40 kg/m³) polyurethane insulation, injected under high pressure.
- 30 mm stainless steel built in and polyurethane insulated working top with 100 mm high splash-back, preventing spillage behind the counter.
- Intuitive, large digital display for electronic control with energy saving function to ensure an optimal control of storing products.
- 10 HACCP alarms capacity which are store when high temperature variation and devices power failure
- Removable pull-out/push-in magnetic door gasket to keep maximum hygiene and maintain the insulating properties.
- Hinged doors with automatic return for a perfect closing that minimize temperature gain. Doors have a 120° dwell position and close automatically at less than 90°.
- Pivotal front panel with easy access for service access and ventilation grid design allowing machine to be embedded without penalizing performance.
- Internally designed forced draft cooling system with low consumption electronic components to guarantee optimal equipment efficiency and performance.
- Optimal air circulation system that guarantees a balanced and constant distribution throughout the equipment, so that the temperature remains uniform. It helps preserve food for longer.
- Height-adjustable stainless steel legs. Height of the legs can be adjusted individually (130 mm - 200 mm) to enable convenient cleaning.
- Automatic evaporation of defrost water.
- Rounded edge interiors, easier cleaning operations to reduce potential dirt traps with a built-in drainage to get rid of waste liquid inside units.
- Removable and height adjustable epoxy coated GN 1/1 grids with a maximum loading capacity of up to 40 kg.
- Equipment with 1 GN 1/1 grids and height adjustable 2 sets of tray slides per each full door.
- Doors on both sides for enhance back and front access to the cooling chamber thus gaining flexibility at work.
- Stainless steel doors with ergonomic, full-length, robust, perfectly integrated handle that ensures practical opening of the drawers and avoids dust and dirt collection.
- Defrost by compressor stop.

POSSIBLE OPTIONS :

- 60 Hz
- Wheels Kit (Factory Assembly)
- Door frame resistance
- Granite countertop
- Connectivity
- Locks
- Without Countertop
- Panoramic aperture
- Remote group

DIMENSIONS

| | | | |
|------------|----------------------|----------------|----------------------|
| X Width | 1340 mm | X Gross width | 1455 mm |
| Y Depth | 768 mm | Y Gross depth | 825 mm |
| Z Height | 850 mm | Z Gross height | 1000 mm |
| Net Weight | 107,0 kg | Gross Weight | 112,0 kg |
| Net volume | 0,881 m ³ | Gross volume | 1,200 m ³ |



ELECTRICITY TECHNICAL SPECIFICATIONS

| | |
|--------------------|----------|
| Electric power | 0,160 kW |
| Voltage | 230V |
| Phases | 1N |
| Electric frequency | 50Hz |
| Amperage (A) | 0,7 A |

COLD TECHNICAL SPECIFICATIONS

| | |
|-----------------------|-----------|
| Temperature | 0 +8 °C |
| Climate class | 5 |
| Refrigeration power | 0,360 kW |
| GWP | 3 |
| Cooling gas load | 100,000 g |
| Gross internal volume | 302 L |
| Noise level | 54,00 dB |
| Condensation system | Vent. |

CONNECTIONS TECHNICAL SPECIFICATIONS

| | |
|--------------------------|----------|
| Single-phase 230V wiring | 2X1+T-2A |
|--------------------------|----------|

OTHERS

| | |
|-----------------|---|
| Number of doors | 4 |
|-----------------|---|





Catalogue
FOOD SERVICE
Chapter
REFRIGERATION

Specific model
ACP-2G/C 230V 1N 50Hz

19089538

18/07/2024

The photo may show the standard model and not the configured one

STANDARD OPTIONS :

- Without breastplate

POSSIBLE ACCESSORIES :

- ACCESSORIES FOR REFRIGERATION
- GASTRONORM GRIDS

SUPPLIED ACCESSORIES:

- 19015961 Tray support guides for fish compartments of dual snack upright. 8
- 19097778 GN 1/1 epoxi grid for GN 1/1 refrigerated upright. 2




Catalogue
FOOD SERVICE
Chapter
REFRIGERATION

Specific model
ACP-2G/C 230V 1N 50Hz

19089538

18/07/2024

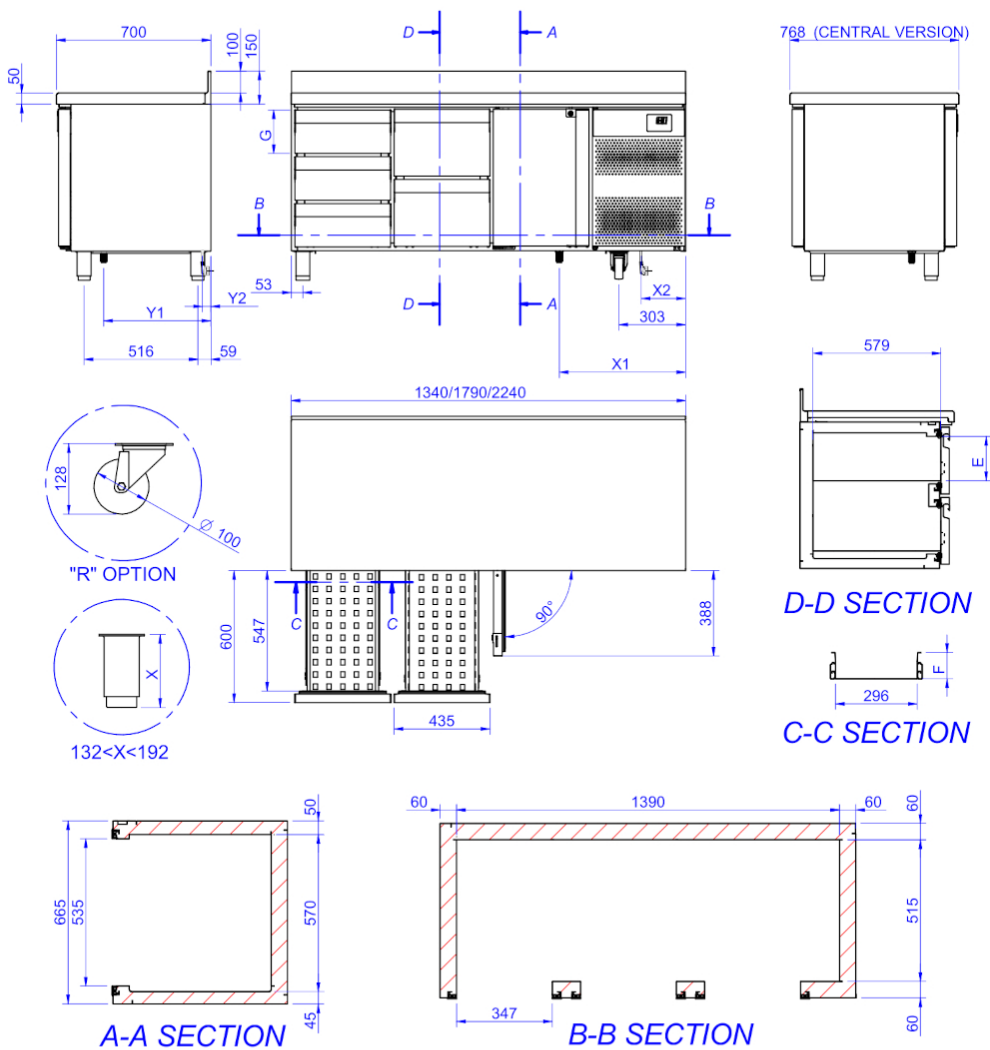

| | | |
|---------------|---------|-----|
| DRAIN | X1 (mm) | 573 |
| | Y1 (mm) | 486 |
| ELECT. | X2 (mm) | 202 |
| | Y2 (mm) | 38 |

| DRAWER | (mm) | | |
|---------------|-------------|----------|----------|
| | E | F | G |
| 1/3 | 105 | 80 | 197 |
| 1/2 | 201 | 166 | 304 |
| 2/3 | 308 | 275 | 410 |