



Catalogue
FOOD SERVICE
Chapter
REFRIGERATION

Specific model
CCN-3G-S 230V 1N 50Hz

19106020

18/07/2024

The photo may show the standard model and not the configured one

DENOMINATION:

Concept gastronorm GN 1/1 700 depth freezing counter with sink with 3 doors.

DESCRIPTION :

- Interior constructed with AISI-304 stainless steel exterior in food grade stainless steel.
- 50 mm thickness, CFC-free, high-density (40 kg/m³) polyurethane insulation, injected under high pressure.
- Heavy-duty stainless-steel working top with 100mm high splash-back, preventing spillage behind the counter.
- Intuitive, digital display for electronic control with energy saving function to ensure an optimal control of storing products.
- Removable pull-out/push-in magnetic door gasket to keep maximum hygiene and maintain the insulating properties
- Hinged doors with automatic return for a perfect closing that minimize temperature gain. Doors have a 120° dwell position and close automatically at less than 90°
- Pivotal front panel with easy access for service access and ventilation grid design allowing machine to be embedded without penalizing performance.
- Internally designed forced draft cooling system with low consumption electronic components to guarantee optimal equipment efficiency and performance
- Optimal air circulation system that guarantees a balanced and constant distribution throughout the equipment, so that the temperature remains uniform. It helps preserve food for longer.
- Height-adjustable stainless steel legs. Height of the legs can be adjusted individually (130 mm - 200 mm) to enable convenient cleaning.
- Automatic evaporation of defrost water.
- Stamped edge interiors, easier cleaning operations to reduce potential dirt traps with a built-in drainage to get rid of waste liquid inside units.
- Removable and height adjustable epoxy coated GN 1/1 grids with a maximum loading capacity of up to 40 kg.
- Equipment with 1 GN 1/1 grids and height adjustable 2 sets of tray slides per each full door.
- Stainless steel doors with ergonomic, full-length, robust, perfectly integrated handle that ensures practical opening of the drawers and avoids dust and dirt collection.
- With 330x330x200 mm stamped bowl.
- Defrost by a heating element to remove ice accumulated in the evaporator.


POSSIBLE OPTIONS :

- Stainless Backing
- Wheels Kit (Factory Assembly)
- Locks
- Left group
- Without breastplate
- Panoramic aperture

STANDARD OPTIONS :

- Door frame resistance

DIMENSIONS



X Width	1792 mm	X Gross width	1910 mm
Y Depth	700 mm	Y Gross depth	825 mm
Z Height	850 mm	Z Gross height	1000 mm
Net Weight	132,0 kg	Gross Weight	139,0 kg
Net volume	1,066 m ³	Gross volume	1,576 m ³

ELECTRICITY TECHNICAL SPECIFICATIONS

Electric power	0,326 kW
Voltage	230V
Phases	1N
Electric frequency	50Hz
Amperage (A)	2,3 A

COLD TECHNICAL SPECIFICATIONS

Temperature	-18 -22 °C
Climate class	4
Refrigeration power	0,364 kW
GWP	3
Cooling gas load	87,000 g
Gross internal volume	428 L
Noise level	56,00 dB
Condensation system	Vent.
Model Type	Counter Cabinet
Annual elec. consumption	2879,85 kWh
Power consumption 24h	7,89 kWh
Frozen net.vol	214 L
IEE	79
Clasif. Energy efficiency	E

CONNECTIONS TECHNICAL SPECIFICATIONS

230 V three-phase wiring	3X1,5
Single-phase 230V wiring	2X1+T-4A

OTHERS

Number of doors	3
-----------------	---





Catalogue
FOOD SERVICE
Chapter
REFRIGERATION

Specific model
CCN-3G-S 230V 1N 50Hz

19106020

18/07/2024

The photo may show the standard model and not the configured one

POSSIBLE ACCESSORIES :

- ACCESSORIES FOR REFRIGERATION
- GASTRONORM GRIDS

SUPPLIED ACCESSORIES:

- 19014778 Tray support guides for GN 2/1 double body upright. 6
- 19097778 GN 1/1 epoxi grid for GN 1/1 refrigerated upright. 3




Catalogue
FOOD SERVICE
Chapter
REFRIGERATION

Specific model
CCN-3G-S 230V 1N 50Hz

19106020

18/07/2024

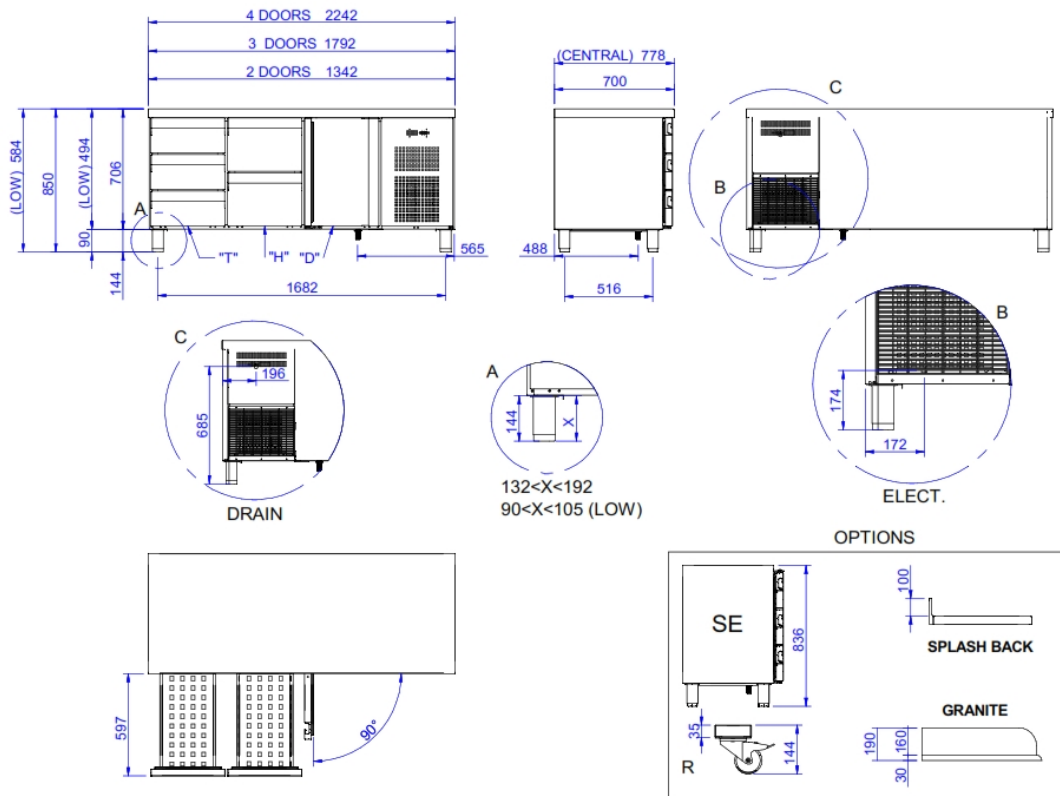

DRAWER DIMENSIONS

