



Catalogue
FOOD SERVICE
Chapter
REFRIGERATION

Specific model
CCP-2S HD 230V 1N 50Hz

19089640

19/07/2024

The photo may show the standard model and not the configured one

DENOMINATION:

Snack 600 depth refrigerated counter with 1 door and 2 drawers 1/2+1/2.

DESCRIPTION :

- Interior constructed with AISI-304 stainless steel exterior in food grade stainless steel.
- 50 mm thickness, CFC-free, high-density (40 kg/m³) polyurethane insulation, injected under high pressure.
- Heavy-duty stainless-steel working top with 100mm high splash-back, preventing spillage behind the counter.
- Intuitive, digital display for electronic control with energy saving function to ensure an optimal control of storing products.
- Removable pull-out/push-in magnetic door gasket to keep maximum hygiene and maintain the insulating properties.
- Hinged doors with automatic return for a perfect closing that minimize temperature gain. Doors have a 120° dwell position and close automatically at less than 90°.
- Pivotal front panel with easy access for service access and ventilation grid design allowing machine to be embedded without penalizing performance.
- Internally designed forced draft cooling system with low consumption electronic components to guarantee optimal equipment efficiency and performance
- Optimal air circulation system that guarantees a balanced and constant distribution throughout the equipment, so that the temperature remains uniform. It helps preserve food for longer.
- Height-adjustable stainless steel legs. Height of the legs can be adjusted individually (130 mm - 200 mm) to enable convenient cleaning.
- Automatic evaporation of defrost water.
- Stamped edge interiors, easier cleaning operations to reduce potential dirt traps with a built-in drainage to get rid of waste liquid inside units.
- Removable and height adjustable epoxy coated grids with a maximum loading capacity of up to 40 kg.
- Equipped with 1 grid 405x460 mm in each edge door and 1 grid 405x525 in centered doors and height adjustable 2 sets of tray slides per each full door.
- Stainless steel doors with ergonomic, full-length, robust, perfectly integrated handle that ensures practical opening of the drawers and avoids dust and dirt collection.
- Stainless steel drawers with perforated bottom plates and telescopic sliding guides, capable of complete retraction, to economize working surface.
- Defrost by compressor stop.

POSSIBLE OPTIONS :

- 60 Hz
- Stainless Backing
- Wheels Kit (Factory Assembly)
- Door frame resistance
- Left group
- Without breastplate
- Without Countertop

POSSIBLE ACCESSORIES :

DIMENSIONS



X Width	1492 mm	X Gross width	1600 mm
Y Depth	600 mm	Y Gross depth	680 mm
Z Height	850 mm	Z Gross height	1000 mm
Net Weight	105,0 kg	Gross Weight	110,0 kg
Net volume	0,761 m3	Gross volume	1,088 m3

ELECTRICITY TECHNICAL SPECIFICATIONS

Electric power	0,203 kW
Voltage	230V
Phases	1N
Electric frequency	50Hz
Amperage (A)	0,96 A

COLD TECHNICAL SPECIFICATIONS

Temperature	0 +8 °C
Climate class	4
Refrigeration power	0,361 kW
GWP	3
Cooling gas load	64,000 g
Gross internal volume	268 L
Noise level	54,00 dB
Condensation system	Vent.
Model Type	Counter Cabinet
Annual elec. consumption	956,30 kWh
Power consumption 24h	2,62 kWh
Refrigeration net.vol	145 L
IEE	44
Clasif. Energy efficiency	C

CONNECTIONS TECHNICAL SPECIFICATIONS

Single-phase 230V wiring	2X1+T-2A
--------------------------	----------

OTHERS

Number of doors	1
-----------------	---





Catalogue
FOOD SERVICE
Chapter
REFRIGERATION

Specific model
CCP-2S HD 230V 1N 50Hz

19089640

19/07/2024

The photo may show the standard model and not the configured one

- ACCESSORIES FOR REFRIGERATION

SUPPLIED ACCESSORIES:

- 19097777 Epoxi grid for snack counters, 405 mm x 460 mm. 1




Catalogue
FOOD SERVICE
Chapter
REFRIGERATION


Specific model
CCP-2S HD 230V 1N 50Hz

19089640

19/07/2024

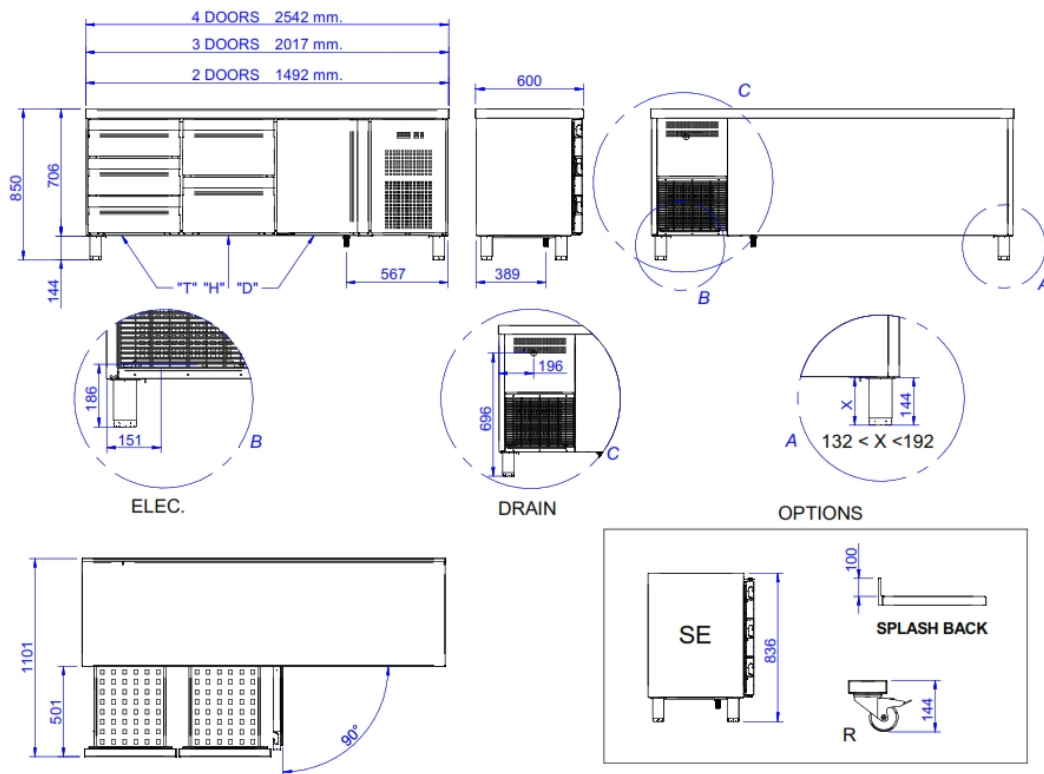

GRILL FIXING DETAIL



DRAWER DIMENSIONS

