



WASHING

HIGH SPIN WASHERS HIGH CAPACITY LA-60C/80C TP2

CHARACTERISTICS

TP2

- User friendly and totally programmable 7".
- USB Connection. PC software free of charge for programming, traceability, data analysis.
- Videos on display (ads, instructions).
- 37 languages.
- 8 dosing signals as standard.

G FACTOR

- High G-Factor 450.

EFFICIENCY

- Intelligent consumption.
- Optimal loading.
- Low water consumption.

VERSATILITY

- Electric < > Hot water.
- WET CLEANING features as standard.

CONNECTIVITY

- IoT - FagorKonnnect standard.
- Remote technical service.
- Management of laundries: OPL.

ERGONOMICS

- Big door diameters: Ø 560 mm.
- Easy opening/closing system for door lock.

MAINTENANCE

- Equivalent parts for all models: contactors, electronic devices, gear.
- Technical menu: traceability, error diagnosis.

OTHERS

- Drum and tub in stainless steel AISI 304.
- 3 water inlets.
- Soft mounted, free standing washers.
- Panels in skinplate.
- Easy to install, no need of fixation to the floor.
- CB and WRAS approved product. Option ETL.
- High spin washers with suspended drum.


OPTIONS

- DQ-2 Dosing pump kit.
- Extra dosing pump DB-1.
- Double drain.
- Tropicalized model: protected board.
- Tilting options: frontal or double tilt.
- Auto Weight: automatic weighing sensor system on feet (Not available with tilting kits).
- Relay card with 6 extra dosing signals: up to 14 signals.
- Stainless steel AISI 304 outer casing.
- Double heating E+S.
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral.



	U.	LA-60C TP2	LA-80C TP2		
DRUM					
Load capacity 1:9 / 1:10	Kg	65/59	85 / 77		
Volume	l	590	770		
Diameter	mm	1.048	1.048		
Depth	mm	680	892		
GENERAL DETAILS					
Washing speed / Spining speed	r.p.m.	38 / 875	38 / 875		
G Factor	-	450	450		
Maximum force transmitted	KN	18 ±4,2	23 ±4,8		
Frequency-dynamic force	Hz	12,66	12,66		
Noise level	dB	< 70	< 70		
Coin laundry version	-	No	No		
Double drain	-	Opt.	Opt.		
Weighing system / Tilting system	-	Opt.	Opt.		
SLUICE option	-	No	No		
DOOR					
Height door center / door base	mm	1.170 / 810	1.170 / 810		
Diameter	mm	560	560		
POWER					
Motor	kW	15	15		
Electric heating power	kW	36	48/36		
Total electric power (electric model)	kW	39	51/39		
Total electric power (hot water, steam)	kW	15	15		
CONNECTIONS		ELECTRIC	STEAM/HOT WATER	ELECTRIC	STEAM/HOT WATER
Tension 230V - III + T	N° x mm2 / A	3x25+T / 100A	3X6+T - 40A	3x25+T / 100A	3X6+T - 40A
Tension 400V - III + N + T	N° x mm2 / A	4x16+T / 63A	4x10+T - 50A	4x25+T / 80A	4x10+T / 50A
Steam inlet (Steam model)	inch	3/4"		3/4"	
Max. steam consumption (Steam model)	Kg/h	21		25	
Water inlet	inch	1"		1"	
Water main pressure	Kg/cm²	2-4		2-4	
Maximum water consumption	Lit/h	598		781	
Drain	mm/inch	3"		3"	
Drainage capacity	Lit/min	200		200	
DIMENSIONS / PACKING DIMENSIONS					
Net Width / Gross Width	mm	1.420 / 1.600			1.420 / 1.600
Net Depth / Gross Depth	mm	1.433 / 1.595			1.645 / 1.805
Net Height / Gross Height	mm	1.890 / 1.930			1.890 / 1.930
Net weight / Gross weight	Kg	1.454 / 1.544			1.800 / 2.000
Volume	m³	4,9			5,6

** Programme No. 2, 100% load

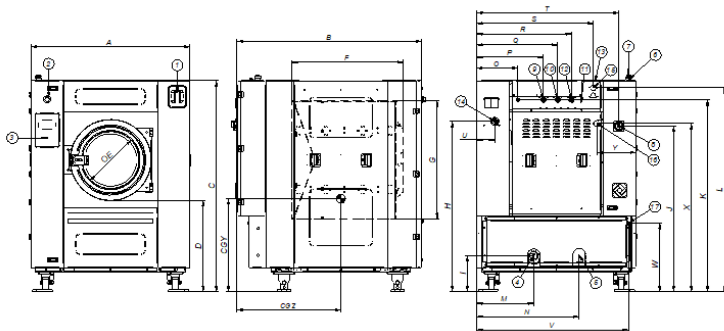

- | | |
|---|------------------------------|
| 01. Soap dispenser | 09. Auxiliar water inlet |
| 02. Emergency stop | 10. Hot water inlet |
| 03. USB port | 11. Equipotential connection |
| 04. Drain 1 | 12. Cold water inlet |
| 05. Drain 2 | 13. Steam output |
| 06. Electric connection to liquid soap pump | 14. Liquid soap connection |
| 07. Electrical connection | 15. Steam connection |
| 08. Main switch | 16. Air intake |
| | 17. Ethernet port |

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
LA-60C	1.420	1.433	1.890	810	560	760	1.050	1.563	323	1.475	1.710	1.817	508	912	367	595	720	845	1.040	1.267	160	1.353	608	1.500	348	830	820
LA-80C	1.420	1.645	1.890	810	560	972	1.050	1.563	323	1.475	1.710	1.817	508	912	367	595	720	845	1.040	1.267	160	1.353	608	1.500	348	830	925