

WASHING

NORMAL SPIN WASHERS LOW AND MEDIUM CAPACITY LN-11/14 TP2



CHARACTERISTICS

TP2

- User friendly and totally programmable 7".
- USB Connection. Online platform free of charge for programming, telemetry, data analysis...thanks to the IoT.
- Videos on display (ads, instructions, etc.).
- 37 languages.
- 8 dosing signals as standard 8 dosing.

G FACTOR

- High G-Factor of 200.

EFFICIENCY

- Intelligent consumption.
- Optimal loading.
- Low water consumption.

VERSATILITY

- Make to order: customisation.
- OPL < > COIN.
- Electric < > Hot water.
- Wet cleaning features.

CONNECTIVITY

- IoT - FagorKonnnect.
- Remote technical service.
- Management of laundries: OPL and selfservice.
- Remote payment.

ERGONOMICS

- Biggest door diameters: Ø373.
- Easy opening/closing system for door lock.

MAINTENANCE

- Hinged control panel: easy and ergonomic access.
- Equivalent parts for all models: contactors, electronic devices,...
- Technical menu: telemetry, error diagnosis.

OTHERS


- Hard mounted washers.
- Anchoring to floor with anchoring base.
- Panels in skinplate.
- Drum and tub in stainless steel AISI 304
- 3 water inlets.
- CB and WRAS approved product Option ETL.

OPTIONS

- DQ-2 Dosing pump kit.
- Extra dosing pump DB-1.
- SLUICE: model with 8mm drum holes.
- Anchoring base.
- External double drain 3".
- Normally closed valve.
- Water FULL FLOW: recirculation of bath water.
- Relay card with 6 extra dosing signals: up to 14 signals.
- Silicone gasket.
- Reversible door opening.
- Tropicalized model: protected board.
- Steam kit to transform an E or HW heated machine into steam version.
- Stainless steel AISI 304 outer casing.
- Stainless steel AISI 304 front panel.
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral.
- Coin / token kit.
- Auto unlock kit for the door.

		U.	LN-11 TP2	LN-14 TP2		
DRUM						
Load capacity 1:9 / 1:10		Kg	11/10	14/13		
Volume		l	100	130		
Diameter		mm	620	620		
Depth		mm	330	430		
GENERAL DETAILS						
Washing speed/ Spinning speed		r.p.m.	53/759	53/759		
Factor G		-	200	200		
Maximum force transmitted		KN	2,0 ±3	2,31 ±4		
Frequency-dynamic force		Hz	8,93	8,93		
Noise level		dB	<70	<70		
Coin laundry version		-	Yes	Yes		
Double drain		-	No	Opt.		
Weighing system / Tilting system		-	No	No		
SLUICE option		-	Yes	Yes		
DOOR						
Height center door/ Height door		mm	570/310	570/310		
Diameter		mm	373	373		
POWER						
Motor		kW	1,1	1,1		
Electric heating power		kW	6	9		
Total electric power (electric model)		kW	6,25	9,5		
Total electric power (hw, steammodel)		kW	1,1	1,1		
CONNECTIONS			ELECTRICAL	STEAM/HOT WATER	ELECTRICAL	STEAM/HOT WATER
Tensión 230V- I + N + T	Nº x mm2 / A		2x6+T / 40A	2x1,5+T / 16A	2x10+T / 50A	2x1,5+T / 16A
Tensión 230V- III + T	Nº x mm2 / A		3x2,5+T / 20A	-	3x4+T / 32A	-
Tensión 400V- III + N + T	Nº x mm2 / A		4x1,5+T / 16A	-	4x1,5+T / 16A	-
Steam inlet (Steam model)	inch		1/2"		1/2"	
Maximum steam consumption (Steam model)	Kg/h		7		8,5	
Water inlet	inch		3/4"		3/4"	
Water main pressure	Kg/cm ²		2-4		2-4	
Maximum water consumption	Lit/h		61,5*		78,8*	
Drain	mm/inch		3"		3"	
Drainage capacity	Lit/min		200		200	
DIMENSIONS / PACKING DIMENSIONS						
Net Width / Gross Width	mm		719/782		719/782	
Net Depth / Gross Depth	mm		755/890		856/990	
Net Height / Gross Height	mm		1.165/1.400		1.165/1.400	
Net weight / Gross weight	Kg		198/231,6		210/245	
Volume	m ³		0,97		1,08	

* Programme No. 20, 75% load

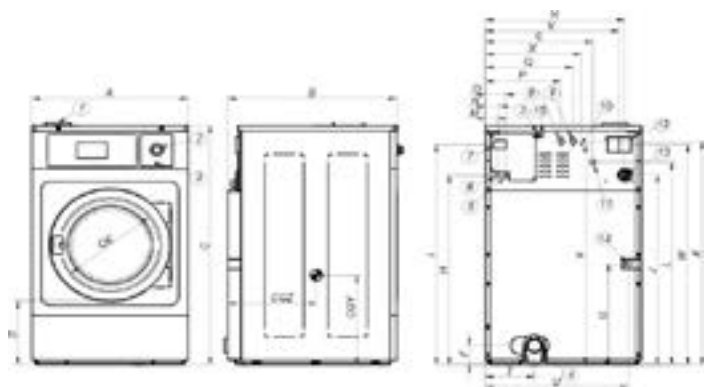

01. Soap dispenser
02. Emergency stop
03. USB port
04. Drain
05. Electric connection to liquid soap pump
06. Electrical connection
07. Main switch

08. Auxiliar water inlet
09. Hot water inlet
10. Equipotential connection
11. Cold water inlet
12. Blur output / Water overload
13. Liquid soap connection
14. Steam connection
15. Ethernet port

		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
LN-11	mm	719	755	1.165	310	373	148	440	886	1.054	889	1.073	958	61	74	101	316	376	637	475	211	654	607	1.053	416	1.053	383	511
LN-14	mm	719	856	1.165	310	373	148	440	886	1.054	889	1.073	958	61	74	101	316	376	637	475	211	654	607	1.053	416	1.053	484	524