

WASHING

NORMAL SPIN WASHERS LOW AND MEDIUM CAPACITY LN-28 TP2

CHARACTERISTICS

TP2

- User friendly and totally programmable 7"
- USB Connection. Online platform free of charge for programming, telemetry, data analysis...thanks to the IoT.
- Videos on display (ads, instructions, etc.)
- 37 languages. 8 dosing signals as standard.
- 8 dosing signals as standard.

G FACTOR

- G-FACTOR 200.

EFFICIENCY

- Intelligent consumption.
- Optimal loading.
- Low water consumption.

VERSATILITY

- Make to order: customisation .
- OPL < > COIN.
- Electric < > Hot water.
- Wet cleaning features.

CONNECTIVITY

- IoT - FagorKconnect.
- Remote technical service.
- Management of laundries: OPL and COIN.
- Remote payment.

ERGONOMICS

- Biggest door diameters: Ø460.
- Easy opening/closing system for door lock.

MAINTENANCE

- Hinged control panel: easy and ergonomic access.
- Equivalent parts for all models: contactors, electronic devices,...
- Technical menu: telemetry, error diagnosis.

OTHERS

- Hard mounted washers.
- Anchoring to floor with anchoring base.
- Panels in skinplate.
- Drum and tub in stainless steel AISI 304
- 3 water inlets.
- CB and WRAS approved product Option ETL.


OPTIONS

- DQ-2 Dosing pump kit.
- Extra dosing pump DB-1.
- SLUICE: model with 8mm drum holes.
- Anchoring base.
- Double drain.
- Normally closed valve.
- Water RE-CYCLE: recirculation of bath water.
- Relay card with 6 extra dosing signals: up to 14 signals.
- Silicone gasket.
- Reversible door opening.
- Tropicalized model: protected board.
- Steam kit to transform an E or HW heated machine into steam version.
- Stainless steel AISI 304 outer casing.
- Stainless steel AISI 304 front panel.
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral.
- Coin / token kit.
- Auto unlock kit for the door.



		U.	LN-28 TP2
DRUM			
Load capacity 1:9 / 1:10		Kg	31/28
Volume		l	280
Diameter		mm	770
Depth		mm	585
GENERAL DETAILS			
Washing speed / Spining speed		r.p.m.	48/682
G Factor		-	200
Maximum force transmitted		KN	3,68 ± 6
Frequency-dynamic force		Hz	8,02
Noise level		dB	<70
Coin laundry version		-	Yes
Double drain		-	Opt.
Weighing System / Tilting System		-	No
SLUICE option		-	Yes
DOOR			
Height center door / Height door		mm	700/400
Diameter		mm	460
POWER			
Motor		kW	4
Electric heating power		kW	18
Total electric power (electric model)		kW	19,2
Total electric power (hw, steam model)		kW	4
CONNECTIONS		ELECTRIC	STEAM / HOT WATER.
Tension 230V - I + N + T	N° x mm2 / A	-	2x4+T / 32A
Tension 230V - III + T	N° x mm2 / A	3x16+T / 63A	3x2,5+T / 20A
Tension 400V - III + N + T	N° x mm2 / A	4x4+T / 32A	4x1,5+T / 16A
Steam inlet (Steam model)	inch	3/4"	
Maximum steam consumption (Steam model)	Kg/h	15	
Water inlet	inch	3/4"	
Water main pressure	Kg/cm ²	2-4	
Maximum water consumption	Lit/h	164,8*	
Drain	mm/inch	3"	
Drainage capacity	Lit/min	200	
DIMENSIONS / PACKING DIMENSIONS			
Net Width / Gross Width	mm	884/945	
Net Depth / Gross Depth	mm	1.075/1.230	
Net Height / Gross Height	mm	1.340/1.583	
Net weight / Gross weight	Kg	403/431	
Volume	m ³	1,84	

* Programme No. 20, 75% load

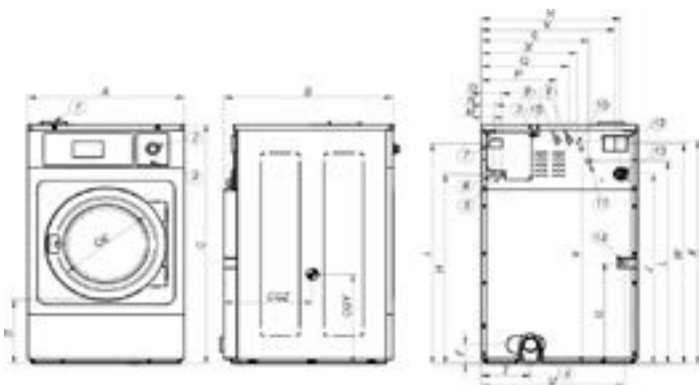

- | | |
|---|----------------------------------|
| 01. Soap dispenser | 08. Auxiliar water inlet |
| 02. Emergency stop | 09. Hot water inlet |
| 03. USB port | 10. Equipotential connection |
| 04. Drain | 11. Cold water inlet |
| 05. Electric connection to liquid soap pump | 12. Blur output / Water overload |
| 06. Electrical connection | 13. Liquid soap connection |
| 07. Main switch | 14. Steam connection |
| | 15. Ethernet port |

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ	
LN-28	mm	884	1.075	1.340	400	460	149	548	1.063	1.230	1.065	1.250	1.135	61	74	101	430	510	801	640	268	820	772	1.220	570	1.210	591	593