

WASHING

NORMAL SPIN WASHER EXTRACTORS HIGH CAPACITY LN-60C/80C TP2

CHARACTERISTICS

TP2

- User friendly and totally programmable 7"
- USB Connection. Online platform free of charge for programming, telemetry, data analysis...thanks to the IoT.
- Videos on display (ads, instructions, etc.)
- 37 languages. 8 dosing signals as standard.
- 8 dosing signals as standard.

G FACTOR

- High G-Factor 150.

EFFICIENCY

- Intelligent consumption.
- Optimal loading.
- Low water consumption.

VERSATILITY

- Make to order: customisation.
- OPL < > COIN.
- Electric < > Hot water.
- WET CLEANING features as standard.

CONNECTIVITY

- IoT - FagorKconnect.
- Remote technical service.
- Management of laundries: OPL.
- Remote payment.

ERGONOMICS

- Big door diameters: Ø 560 mm.
- Easy opening/closing system for door lock.

MAINTENANCE

- Hinged control panel: easy and ergonomic access.
- Equivalent parts for all models: contactors, electronic devices,...
- Technical menu: telemetry, error diagnosis.diagnosis.

OTHERS

- Hard mounted washers.
- Anchoring to floor with anchoring base.
- Panels in skinplate.
- Drum and tub in stainless steel AISI 304.
- 3 water inlets (Water inlet hoses not included).
- CB and WRAS approved product Option ETL.


OPTIONS

- DQ-2 Dosing pump kit.
- Extra dosing pump DB-1.
- SLUICE: model with 8mm drum holes.
- Anchoring base.
- Double drain.
- Normally closed valve.
- Water inlet hose.
- Relay card with 6 extra dosing signals: up to 14 signals.
- Reversible door opening.
- Tropicalized model: protected board.
- Steam kit to transform an E or HW heated machine into steam version.
- Stainless steel AISI 304 outer casing.
- Stainless steel AISI 304 front panel.
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral.
- Coin / token kit.
- Auto unlock kit for the door.
- Stainless steel AISI 304 outer casing.
- Front soap dispenser.



	U.	LN-60C TP2	LN-80C TP2		
DRUM					
Load capacity 1:9 / 1:10	Kg	65/59	85/77		
Volume	l	590	770		
Diameter	mm	1.048	1.048		
Depth	mm	684	936		
GENERAL DETAILS					
Washing speed / Spining speed	r.p.m.	42,5 / 505	42,5 / 505		
G Factor	-	150	150		
Maximum force transmitted	KN	9,12 ± 15	10,17 ± 15		
Frequency-dynamic force	Hz	6,93	6,93		
Noise level	dB	< 70	< 70		
Coin laundry version	-	Yes	Yes		
Double drain	-	Opt.	Opt.		
Weighing system / Tilting system	-	No	No		
SLUICE option		Yes	Yes		
DOOR					
Height center door / Height door	mm	900 / 540	900 / 540		
Diameter	mm	560	560		
MOTOR					
Motor	kW	5,5	7,5		
Electric heating power	kW	36	48/36***		
Total electric power (electric model)	kW	38	50,5/38,5***		
Total electric power (hot water, steam)	kW	5,5	7,5		
CONNECTIONS					
		ELECTRIC	STEAM/HOT WATER	ELECTRIC	STEAM/HOT WATER
Tension 230V - III + T	N° x mm2 / A	3x25+T / 100A	3x4+T / 32A	3x25+T / 100A	3x4+T / 32A
Tension 400V - III + N + T	N° x mm2 / A	4x16+T / 63A	4x1,5+T / 16A	4x25+T / 80A	4x4+T / 20A
Steam inlet (Steam model)	inch	3/4"		3/4"	
Max. steam consumption (Steam model)	Kg/h	21		21	
Water inlet	inch	1"		1"	
Water main pressure	Kg/cm ²	2-4		2-4	
Maximum water consumption	Lit/h	627,9**		814,5**	
Drain	mm/inch	3"		3"	
Drainage capacity	Lit/min	200		200	
DIMENSIONS / PACKING DIMENSIONS					
Net Width / Gross Width	mm	1.225 / 1.335		1.225 / 1.335	
Net Depth / Gross Depth	mm	1.315 / 1.440		1.492 / 1.660	
Net Height / Gross Height	mm	1.640 / 1.860		1.640 / 1.860	
Net weight / Gross weight	Kg	792 / 878		871 / 963	
Volume	m ³	3,6		4,12	

** Programme No. 2, 100% load
 ***400V=48kW / 230V=36kW version

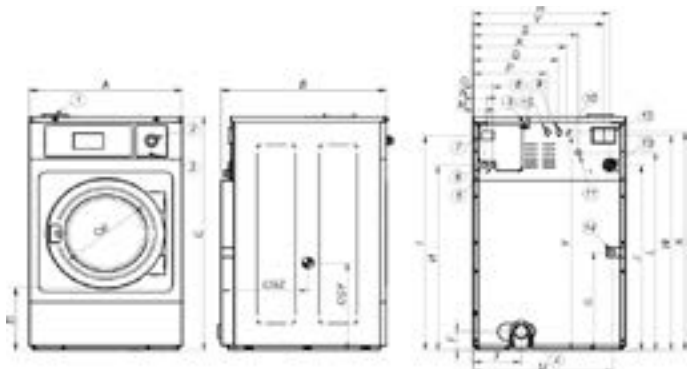

- 01. Soap dispenser
- 02. Emergency stop
- 03. USB port
- 04. Drain
- 05. Electric connection to liquid soap pump
- 06. Electrical connection
- 07. Main switch
- 08. Auxiliar water inlet
- 09. Hot water inlet
- 10. Equipotential connection
- 11. Cold water inlet
- 12. Blur output / Water overload
- 13. Liquid soap connection
- 14. Steam connection
- 15. Ethernet port

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
LN-60C	1.225	1.315	1.640	540	560	115	984	1.368	1.536	1.306	1.551	1.318	61	74	101	651	731	1.110	869	318	1.163	1.080	1.470	992	1.595	644	972
LN-80C	1.225	1.492	1.640	540	560	115	984	1.368	1.536	1.306	1.551	1.318	61	74	101	651	731	1.110	869	318	1.163	1.080	1.470	992	1.595	644	750