



# DRYING

## STACK DRYERS CONCEPT SR-2-22 M



### CHARACTERISTICS

#### M PROGRAMMER

- M programmer: push buttons to control temperature and time.

#### OUTSTANDING FEATURES

- Reversing drum action as standard.
- Stainless steel drum as standard.
- Frequency inverter as standard.

#### EFFICIENCY

- MIXED FLOW - mixed axial-radial airflow.
- Big fluff filter.

#### VERSATILITY

- Make to order - customisation.
- OPL > Multivending - Standard OPL model easily trasformable to coin laundry uses.

#### ERGONOMICS

- Drawer as fluff filter, made of stainless steel.
- Biggest door diameters.

#### MAINTENANCE

- Hinged panel: easy and ergonomic access.
- Technical menu: statistics for technicians and maintenance with external console (with console option)


#### OTHERS

- Grey skinplate outer casing, stainless steel look.
- FK - Integrated Fire Extinguishing System.
- SOFT TOUCH - drum with stamped holes.
- COOL DOWN - anti-wrinkle at the end of the cycle.
- Heating options: electric, gas.
- CE approved.

#### OPTIONS

- Screen in M programmer (2 units).
- Double dooglass.
- Fluff filter grid 0,3 mm (standard in STACK is 0,6 mm).
- Stainless steel front and side panels.
- Front panel in stainless steel.
- Maritime ooden packing.
- Ship voltage for electric models: 440V III 50/60 Hz No neutral.
- Other voltagages available.

CAPACITY		
Capacity 1/18	Kg	24,3 x 2
	Lb	53,6 x 2
Capacity 1/20	Kg	21,9 x 2
	Lb	48,3 x 2
DRUM		
Ø Drum	mm	835
	inch	32,87
Drum length	mm	800
	inch	31,5
Drum volume	l	440
	cu ft	15,54
Ø Door	mm	575
	inch	22,64
Floor to door center	mm	574 / 1618
	inch	22,60 / 63,70
Floor to lower part of the door	mm	214 / 1258
	inch	8,46/49,53
Drum motor power	kW	0,37 x 2
GAS POWER		
Installed heating power gas	kcal/h	26139 x 2
	Btu/h	103658.5 x 2
Installed heating power gas	kW	30,4 x 2
Installed electrical power	Kw	1,94
Instant propane gas consumption (G31)	Kg/h	2,61 x 2
	Lb/h	5.75 x 2
Instant natural gas consumption (G20)	m³/h	3,22 x 2
	cfm	1.89 x 2
Evaporation capacity	l/h	44,
	USgallon/h	11,624
Hourly output	Kg/h	88
	Lb/h	194
Ø Gas inlet	BSPP ISO 228-1	3/4"
VENTILATION		
Nominal air flow	m³/h	900 x 2
	cfm	529,72 x 2
Air outlet Ø	mm	250
	inch	9,84
Fan motor power	kW	0,55 x 2
HEAT DISSIPATION		
Total max heat dissipation	kW	2,6
	Btu/h	8876,8
Front pannel max heat dissipation	kW	1,9
	Btu/h	6486,9
CONNECTIONS		
		GAS
Tension 230V - I + N + T	Nº x mm2 / A	3 x 2,5 / 20 A
Tension 230V - III + T	Nº x mm2 / A	3 x 2,5 / 20 A
Tension 400V - III + N + T	Nº x mm2 / A	3 x 2,5 / 20 A
DIMENSIONS / PACKING DIMENSIONS		
Net width / Gross width	mm	870 / 950
	inch	34,25 / 37,4
Net depth / Gross depth	mm	1312 / 1395
	inch	51,65 / 54,92
Net height / Gross height	mm	2118 / 2250
	inch	83,39 / 88,58
Net weight / Gross weight	Kg	373,5 / 388,5
	Lb	823,43 / 856,50
OTHERS		
Sound level	dB	64

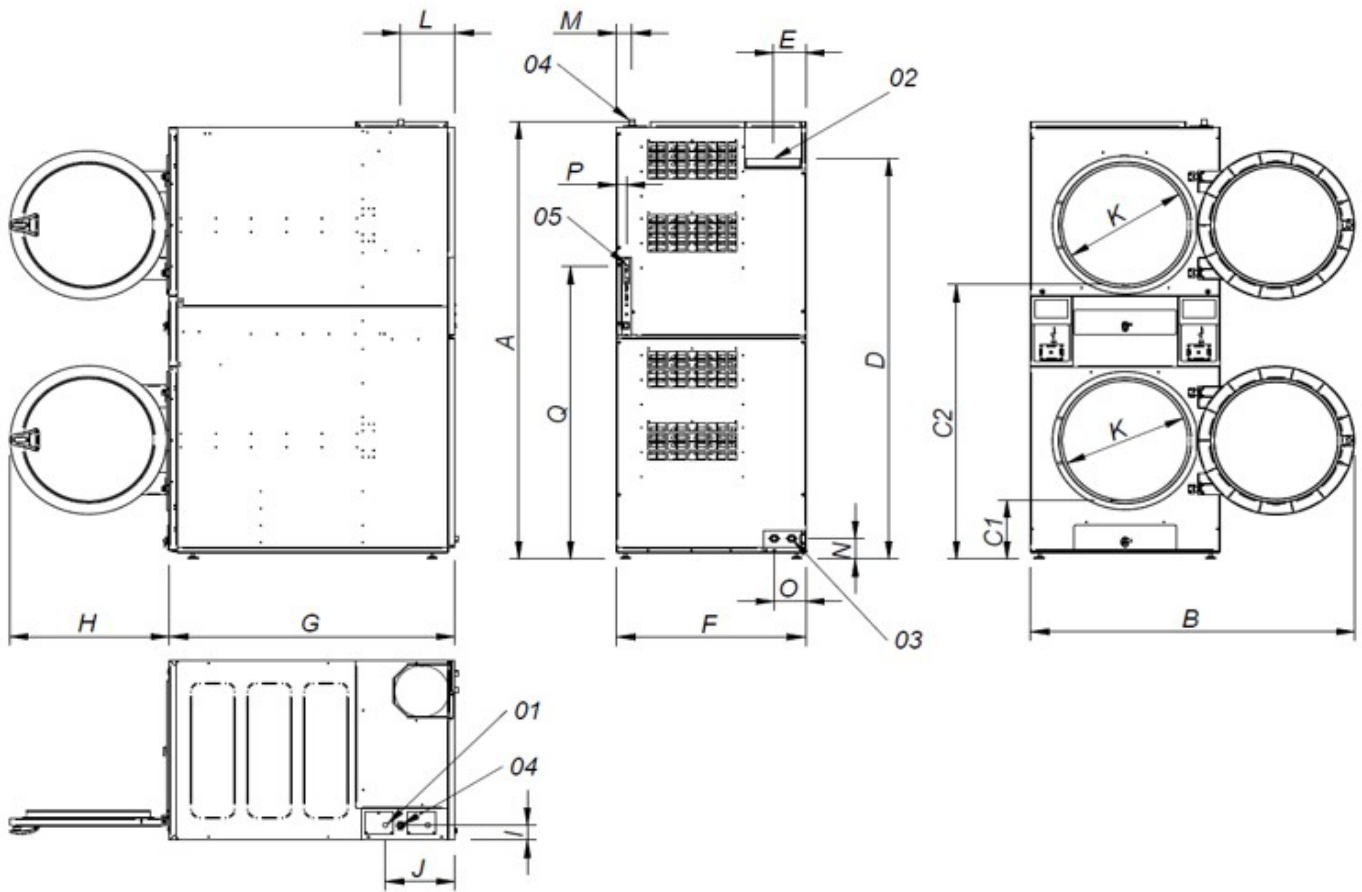

- 01. Power supply
- 02. Fumes output Ø250
- 03. 2 Sprinkler valves 3/4"
- 04. Gas inlet 3/4"
- 05. Ethernet connection (Only control Touch)

	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
SR-2-22 M	2118	1490	286	1330	1940	149	870	1312	735	73	320	575	250	70	100	145	45	1416