



FINISHING

FINISHING TOPPER FOR TROUSERS T-3000 C/A





CHARACTERISTICS

- 2 MODELS
 - C: without boiler
 - A: with boiler
- With air-operated waistband and leg stretching device, for central steam and compressed air supplies.
- Side waistband stretching device.
- Height adjustable leg stretching carriage and leg clamps made of stainless steel.
- Built-in three phases fan. Air heating device.
- Electronic card for the setting of 9 ironing cycles in total.
- Ironing cycle controlling: steaming time, steam/air time, drying time.
- Three pressure regulators (for leg clamps, waistband stretcher and leg stretching carriage).
- Switch for the exclusion of the leg stretching carriage.
- Manual size indicator.
- Mechanical airflow regulator.
- It needs compressed air, 5 bar - 40 NI/min.
- Connection: 230/400V III 50Hz

TECHNICAL DATA

FINISHING TOPPER FOR TROUSERS | T-3000 C/A

	UNIT.	T-3000 C	T-3000 A
GENERAL DETAILS			
Boiler	-	No	Yes
Compressor	-	No	No
Group of Iron	-	-	-
Steam gun	-	-	-
POWER			
Vacuum Motor	HP	-	-
Pump Motor	HP	-	-
Compressor motor (Mod. with option)	HP	-	-
Boiler Heater (Mod. with option)	kW	-	6
Fan motor	HP	1-1,5	1-1,5
CONNECTIONS			
Ø Water inlet	BSP	-	-
Ø Steam inlet	BSP	3/8"	-
Ø Condensate outlet	BSP	3/8"	-
Steam pressure	BAR	5	5
Steam Consumption	Kg/h	15-20	-
Ø Air inlet	BSP	1/4"	1/4"
Ø Air pressure	BAR	5	5
Ø Air Consumption	NI/m	40	40
DIMENSIONS / PACKING DIMENSIONS			
Width / Width	mm	1.115/1.210	1.115/1.210
Depth / Depth	mm	630/780	630/780
Height / Height	mm	1.950/2.100	1.950/2.100
Net weight / Gross weight	kg	119/175	165/225
Volume	m ³	1,37/1,98	1,37/1,98
OTHERS			
Voltage	Hz	230/400V III 50/60	230/400V III 50/60
Sound level	dB	70	70

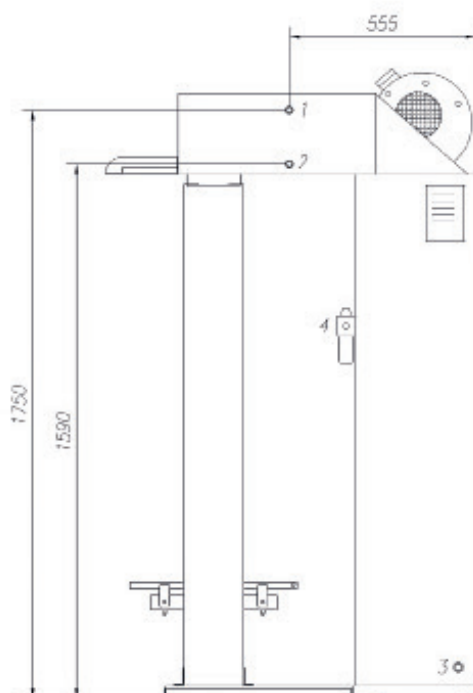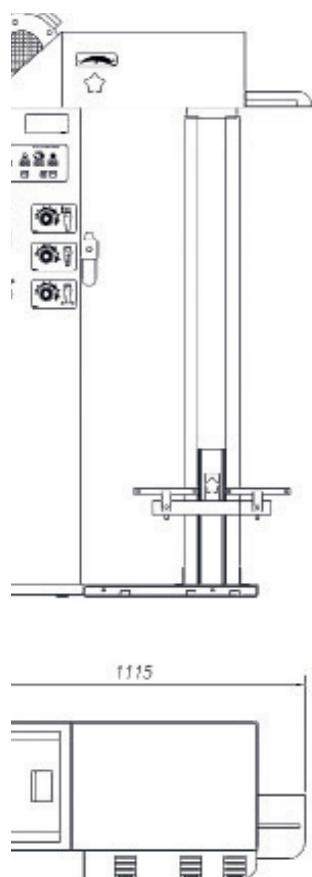

- 01. Steam inlet
- 02. Condensate purge
- 03. Inlet electrical power
- 04. Compressed air inlet