



IRONING AND FOLDING

WALL IRONERS ROLLER Ø25 P-25-140/200 M PLUS

CHARACTERISTICS

ELECTRONIC PROGRAMMER M

- Simple and user friendly with an auto mode: automatic management of the ironing speed according to the selected temperature.
- Digital speed and temperature display

EFFICIENCY

- Acoustic comfort : <60 dB max
- Minimum space requirement: space saving, suitable for small spaces.
- Ideal for processing small quantity of flat linen in facilities like restaurants, guest rooms, hostels...

ROBUSTNESS

- Nomex coating: resistant to high temperatures
- Panels in grey skinplate and stainless steel
- Wooden feeding table
- New kinematics: better reliability
- Industrial roll axle and bearings: more durable

FEATURES

- Large roll contact area with the linen
- Mode of operation identical to a flatwork ironer: no roll lifting, more ergonomic.
- Models equipped with Nomex belts, suction and variable speed inverter: more productivity.
- Adjustable speed and temperature.

MAINTENANCE



- Easy installation : requires only an electrical connection.
- Easy access on both sides for maintenance.
- Quick and easy dismantling of bearings

OTHERS

- Irons flat linen containing a residual moisture of up to 25% (recommended between 5 and 10% for other models)
- Front feeding and return
- Roll ø 250 mm
- Working widths: 1.400 and 2.000 mm
- Electric heating
- CE certification

OPTIONS


- Marine voltage 440V III 60 Hz without N
- 230V III+T 50-60 Hz

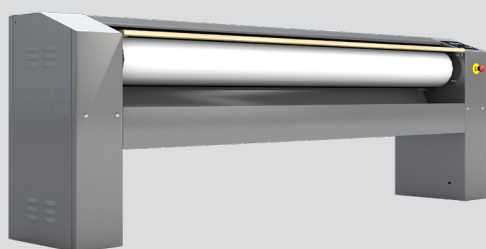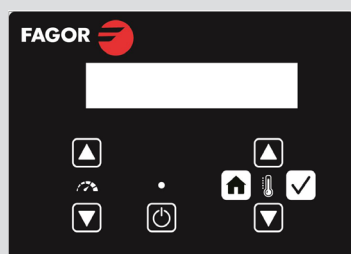

TECHNICAL DATA WALL IRONERS | ROLLER Ø25 | P-25-140/200 M PLUS

	UNIT.	P-25/140 M PLUS	P-25/200 M PLUS
GENERAL DATA			
Theoretical production*	Kg/h	40	50
	Lb/h	88,18	110,23
Ø Roll	mm	250	250
	inch	9,84	9,84
Working width	mm	1.400	2.000
	inch	55,12	78,74
Working speed	m/min	1,5 - 6	1,5 - 6
	ft/mn	4,9 - 19,6	4,9 - 19,6
Electronic control	-	Yes	Yes
Chest motion	-	-	-
POWER			
Heating power	kW	7	12
Roll motor power	kW	0,18	0,18
Fan motor power	kW	0,12	0,12
Total electric power	kW	7,3	12,3
CONNECTIONS		ELECTRIC	ELECTRIC
Tension 230V - III + T	n° x mm² / A	4 x 6 / 20A	4 x 10 / 40A
	n° x AWG/A	4 x 9 / 20A	4 x 7 / 40A
Tension 400V - N + III + T	n° x mm² / A	5 x 4 / 16A	5 x 4 / 20A
	n° x AWG/A	5 x 11 / 16A	5 x 11 / 20A
DIMENSIONS / PACKING DIMENSIONS			
Net width/ Gross width**	mm	1.923 / 1.890	2.523 / 2.490
	inch	76 / 74	99 / 98
Net depth/ Gross depth	mm	484 / 540	484 / 540
	inch	19 / 21	19 / 21
Net height/ Gross height	mm	985 / 1.130	985 / 1.130
	inch	39 / 44	39 / 44
Net weight/ Gross weight	Kg	154 / 174	184 / 204
	Lb	340 / 384	406 / 450
Net volume / Gross volume	m³	0,92 / 1,15	1,20 / 1,52
	ft³	32,38 / 40,73	42,48 / 53,66
OTHERS			
Nº Fume outlet	Nº	1	1
ø Fume outlet	mm	80	80
	inch	3,15	3,15
Air flow	m³/h	500	500
	cfm	294	294
Noise level	dB	60	60

*20% - 25% residual moisture
 **Suction disassembly on the left side

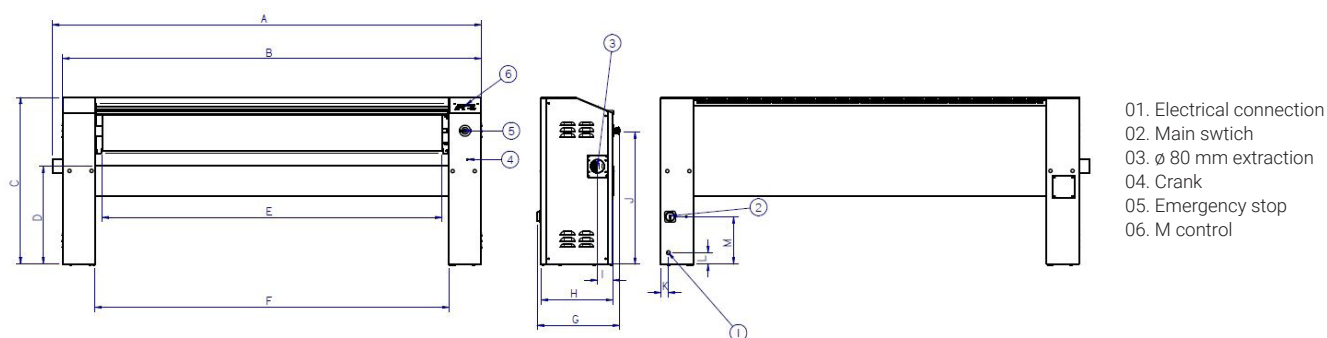

	A	B	C	D	E	F	G	H	I	J	K	L	M
P-25/140 M PLUS	1.922	1.862	985	610	1.400	1.480	484	423	91	791	45	75	287
P-25/200 M PLUS	2.522	2.462	985	610	2.000	2.080	484	423	91	791	45	75	287