



WASHING

HIGH SPIN WASHERS LOW AND MEDIUM CAPACITY LA-18/22 TP2

CHARACTERISTICS

TP2

- User friendly and totally programmable 7".
- USB Connection. Online platform free of charge for programming, telemetry, data analysis...thanks to the IoT.
- Videos on display (ads, instructions, etc.).
- 37 languages.
- 8 dosing signals as standard.

G FACTOR

- High G-Factor: G-FACTOR 450-500.

EFFICIENCY

- Intelligent consumption.
- Optimal loading.
- Water Recovery tanks ready: KRS.
- Low water consumption.

VERSATILITY

- Make to order: customisation.
- OPL < > COIN.
- Electric < > Hot water.
- Drain valve < > Pump.
- Wet cleaning features.

CONNECTIVITY

- IoT - FagorKonnnect standard.
- Remote technical service.
- Management of laundries: OPL and COIN.
- Remote payment.

ERGONOMICS

- Biggest door diameters: Ø460.
- Easy opening/closing system for door lock.

MAINTENANCE

- Hinged control panel: easy and ergonomic access.
- Technical menu: statistics for technicians and maintenance with external console (with console option).

OTHERS

- Grey skinplate outer casing.
- Drum and tub in stainless steel AISI 304.
- Detergent dispenser with 4 compartments.
- Electronic control of imbalance with frequency control.
- LOADING AID system: water and rotation control.
- CB and WRAS approved product. Option ETL.
- High spin washers with suspended drum.


OPTIONS

- DQ-2 Dosing pump kit.
- Extra dosing pump DB-1.
- Double drain.
- Normally closed valve.
- WaterFULL FLOW recirculation of bath water.
- Levelling feet .
- Auto Weight: automatic weighing sensor system on feet (Includes kit with 6 extra dosing signals).
- Relay card with 6 extra dosing signals: up to 14 signals.
- Silicone gasket.
- Reversible door opening.
- Tropicalized model: protected board.
- Steam kit to transform an E or HW heated machine into steam version.
- Plinth to level all machines from top.
- Plinth to align the doorbase at 850mm).
- Plinth for mops with drawer inox/skinplate.
- Stainless steel outer casing.
- Stainless steel front panel.
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral.
- Coin/token kit.
- Auto unlock kit for the door.



| | U. | LA-18 TP2 | LA-22 TP2 | | |
|-----------------------------------------|--------------------|-----------------|------------------------|-----------------|------------------------|
| DRUM | | | | | |
| Load capacity 1:9 / 1:10 | Kg | 20/18 | 25/22 | | |
| Volume | l | 180 | 220 | | |
| Diameter | mm | 700 | 700 | | |
| Depth | mm | 470 | 560 | | |
| GENERAL DETAILS | | | | | |
| Washing speed / speed | r.p.m. | 47/1.133 | 47/1.071 | | |
| G Factor | - | 500 | 450 | | |
| Maximum force transmitted | KN | 3,41 ±1,4 | 4,12 ±1,4 | | |
| Frequency-dynamic force | Hz | 16 | 16 | | |
| Noise level | dB | <70 | <70 | | |
| Coin laundry version | - | Yes | Yes | | |
| Double drain | - | Opt. | Opt. | | |
| Weighing System / Tilting System | - | Opt./No | Opt./No | | |
| SLUICE option | - | No | No | | |
| DOOR | | | | | |
| Height center door / Height door | mm | 765/450 | 765/450 | | |
| Diameter | mm | 460 | 460 | | |
| POWER | | | | | |
| Motor | kW | 2,2 | 2,2 | | |
| Electric heating power | kW | 12 | 12 | | |
| Total electric power (electric model) | kW | 12,75 | 12,75 | | |
| Total electric power (hw, steam model) | kW | 2,2 | 2,2 | | |
| CONNECTIONS | | ELECTRIC | STEAM/HOT WATER | ELECTRIC | STEAM/HOT WATER |
| Tension 230V - I + N + T | N° x mm2 / A | 2x16+T / 63A | 2x1,5+T / 16A | 2x16+T / 63A | 2x1,5+T / 16A |
| Tension 230V - III + T | N° x mm2 / A | 3x6+T / 40A | - | 3x6+T / 40A | - |
| Tension 400V - III + N + T | N° x mm2 / A | 4x4+T / 32A | - | 4x4+T / 32A | - |
| Steam inlet (Steam model) | inch | 1/2" | | 1/2" | |
| Maximum steam consumption (Steam model) | Kg/h | 12 | | 12 | |
| Water inlet | inch | 3/4" | | 3/4" | |
| Water main pressure | Kg/cm ² | 2-4 | | 2-4 | |
| Maximum water consumption | Lit/h | 118,3* | | 118,3* | |
| Drain | mm/inch | 3" | | 3" | |
| Drainage capacity | Lit/min | 200 | | 200 | |
| DIMENSIONS / PACKING DIMENSIONS | | | | | |
| Net Width / Gross Width | mm | 884/945 | | 884/945 | |
| Net Depth / Gross Depth | mm | 913/1.030 | | 1.003/1.115 | |
| Net Height / Gross Height | mm | 1.405 / 1.680 | | 1.405/1.680 | |
| Net weight / Gross weight | Kg | 344,5/388 | | 360/403,5 | |
| Volume | m ³ | 1,63 | | 1,77 | |

* Programme No. 20, 75% load

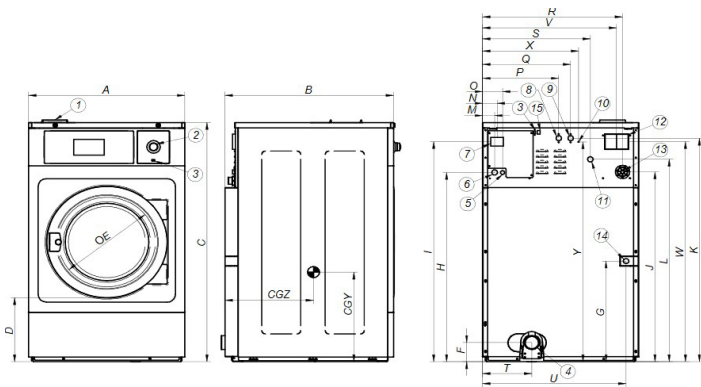

- 01. Soap dispenser
- 02. Emergency stop
- 03. USB port
- 04. Drain
- 05. Electric connection to liquid soap pump
- 06. Electrical connection
- 07. Main switch

- 08. Auxiliar water inlet
- 09. Hot water inlet
- 10. Equipotential connection
- 11. Cold water inlet
- 12. Blur output / Water overload
- 13. Liquid soap connection
- 14. Steam connection
- 15. Ethernet port

| | A | B | C | D | E | F | G | H | I | J | K | L | M | N | O | P | Q | R | S | T | U | V | W | X | Y | CGY | CGZ | |
|-------|----|-----|-------|-------|-----|-----|-----|-----|-------|-------|-------|-------|-------|----|----|-----|-----|-----|-----|-----|-----|-----|-----|-------|-----|-------|-----|-----|
| LA-18 | mm | 884 | 913 | 1.405 | 450 | 460 | 125 | 380 | 1.135 | 1.303 | 1.138 | 1.322 | 1.207 | 61 | 74 | 101 | 429 | 509 | 802 | 640 | 322 | 814 | 772 | 1.303 | 569 | 1.297 | 464 | 702 |
| LA-22 | mm | 884 | 1.003 | 1.405 | 450 | 460 | 125 | 380 | 1.135 | 1.303 | 1.138 | 1.322 | 1.207 | 61 | 74 | 101 | 429 | 509 | 802 | 640 | 322 | 814 | 772 | 1.303 | 569 | 1.297 | 464 | 747 |