



**Catalogue**  
FOOD SERVICE  
**Chapter**  
REFRIGERATION

**Specific model**  
CUN-22G 230V 1N 50Hz

19089458

17/07/2024

The photo may show the standard model and not the configured one

**DENOMINATION:**

Concept gastronorm GN 2/1 freezing upright, double body with 2 doors.

**DESCRIPTION :**


- Interior constructed with AISI-304 stainless steel exterior in food grade stainless steel.
- 60 mm thickness, CFC-free, high-density (40 kg/m<sup>3</sup>) polyurethane insulation, injected under high pressure.
- Embedded inner guides with 23 different level position 55 mm distance among them, enable more convenient cleaning operations without difficulties.
- Intuitive, digital display for electronic control with energy saving function to ensure an optimal control of storing products.
- Removable pull-out/push-in magnetic door gasket to keep maximum hygiene and maintain the insulating properties.
- Hinged doors with automatic return for a perfect closing that minimize temperature gain. Doors have a 120° dwell position and close automatically at less than 90°.
- Pivotable panel with better access to control that facilitates service, thus enlarging the useful life of the equipment.
- Automatic evaporation of defrost water.
- Internally designed forced draft cooling system with low consumption electronic components to guarantee optimal equipment efficiency and performance.
- Optimal air circulation system that guarantees a balanced and constant distribution throughout the equipment, so that the temperature remains uniform. It helps preserve food for longer.
- Height-adjustable stainless steel legs. Height of the legs can be adjusted individually (125 mm - 200 mm) to enable convenient cleaning.
- Low energy consumption LED lighting vertically located in the interior of compartment.
- Stamped edge interiors, for easier cleaning operations to reduce potential dirt traps with a built-in drainage to get rid of waste liquid inside units.
- Removable and height adjustable epoxy coated GN 2/1 grids with a maximum loading capacity of up to 40 kg.
- Suitable for 1 x GN2/1 or 2 x GN1/1 food containers.
- Stainless steel doors with ergonomic, full-length, robust, perfectly integrated handle. that ensures practical opening and avoids dust and dirt collection.
- Defrost by hot gas coming from the compressor is used to remove ice accumulated in the evaporator reducing defrost time and achieving even less energy consumption.
- Equipped with 3 GN2/1 grid per each full door and a set of grid support guides for middle beam.

**POSSIBLE OPTIONS :**

- 60 Hz
- Stainless Backing
- Wheels Kit (Factory Assembly)
- Locks
- Pedal
- Remote group

**STANDARD OPTIONS :**

**DIMENSIONS**



X Width	1318 mm	X Gross width	1430 mm
Y Depth	842 mm	Y Gross depth	880 mm
Z Height	2040 mm	Z Gross height	2063 mm
Net Weight	227,0 kg	Gross Weight	240,0 kg
Net volume	2,264 m3	Gross volume	2,596 m3

**ELECTRICITY TECHNICAL SPECIFICATIONS**

Electric power	0,749 kW
Voltage	230V
Phases	1N
Electric frequency	50Hz
Amperage (A)	4,4 A

**COLD TECHNICAL SPECIFICATIONS**

Temperature	-18 -22 °C
Climate class	4
Refrigeration power	0,907 kW
GWP	3
Cooling gas load	138,000 g
Gross internal volume	1186 L
Noise level	58,00 dB
Condensation system	Vent.
Model Type	Vertical cabinet
Annual elec. consumption	4793,00 kWh
Power consumption 24h	13,27 kWh
Frozen net.vol	874 L
IEE	84
Clasif. Energy efficiency	E

**CONNECTIONS TECHNICAL SPECIFICATIONS**

Single-phase 230V wiring	2X1+T-4A
--------------------------	----------





**Catalogue**  
FOOD SERVICE  
**Chapter**  
REFRIGERATION

**Specific model**  
CUN-22G 230V 1N 50Hz

19089458

17/07/2024

The photo may show the standard model and not the configured one

- Door frame resistance

**POSSIBLE ACCESSORIES :**

- ACCESSORIES FOR REFRIGERATION
- GASTRONORM GRIDS

**SUPPLIED ACCESSORIES:**

- 19097787 GN 2/1 epoxi grid for GN 2/1 refrigerated upright. 6







**Catalogue**  
FOOD SERVICE  
**Chapter**  
REFRIGERATION




**Specific model**  
CUN-22G 230V 1N 50Hz

19089458



17/07/2024

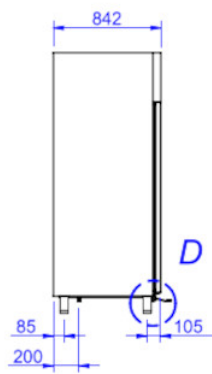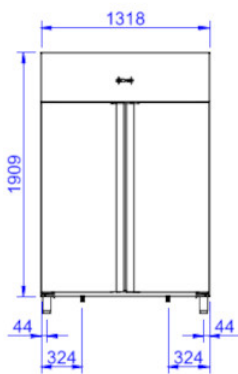


SECTION B-B

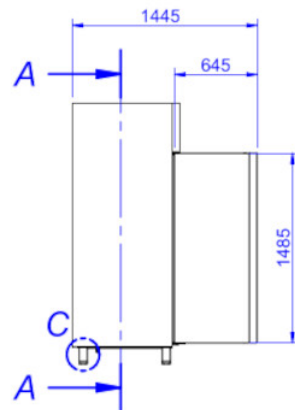


SECTION A-A




E  
ELECT.



"R" OPTION



C  
132 < X < 192



D  
"PD" OPTION