



# WASHING

## HIGH SPIN WASHERS LOW AND MEDIUM CAPACITY LA-35C/45C TP2

### CHARACTERISTICS

#### TP2

- User friendly and totally programmable 7".
- USB Connection. Online platform free of charge for programming, telemetry, data analysis... thanks to the IoT.
- Videos on display (ads, instructions).
- 37 languages.
- 8 dosing signals as standard.

#### G FACTOR

- High G-Factor: G-FACTOR 450.

#### EFFICIENCY

- Intelligent consumption.
- Optimal loading.
- Water Recovery tanks ready: KRS.
- Low water consumption.

#### VERSATILITY

- Make to order: customisation.
- OPL < > COIN.
- Electric < > Hot water.
- Drain valve < > Pump.
- Wet cleaning features.

#### CONNECTIVITY

- IoT - FagorKonnnect standard.
- Remote technical service.
- Management of laundries: OPL and COIN.
- Remote payment.

#### ERGONOMICS

- Biggest door diameters: Ø560.
- Easy opening/closing system for door lock.

#### MAINTENANCE

- Hinged control panel: easy and ergonomic access.
- Technical menu: statistics for technicians and maintenance with external console (with console option).

#### OTHERS


- Grey skinplate outer casing.
- Drum and tub in stainless steel AISI 304.
- Detergent dispenser with 4 compartments.
- Electronic control of imbalance with frequency control.
- LOADING AID system: water and rotation control.
- CB and WRAS approved product. Option ETL.
- High spin washers with suspended drum.

#### OPTIONS

- DQ-2 Dosing pump kit.
- Extra dosing pump DB-1.
- Double drain.
- Normally closed valve.
- Water FULL FLOW: recirculation of bath water.
- Levelling feet.
- Auto Weight: automatic weighing sensor system on feet (Includes kit with 6 extra dosing signals).
- Relay card with 6 extra dosing signals: up to 14 signals.
- Reversible door opening.
- Tropicalized model: protected board.
- Steam kit to transform an E or HW heated machine into steam version.
- Plinth to align loading height (door base at 850mm).
- Stainless steel AISI 304 outer casing.
- Stainless steel AISI 304 front panel (LA-35C).
- Maritime voltage for electric models: 440V III 50/60 Hz.
- No neutral.
- Voltage 230 V III 50/60 Hz.
- Coin/token kit.
- Auto unlock kit for the door.



	U.	LA-35C TP2	LA-45C TP2		
<b>DRUM</b>					
Load capacity 1:9 / 1:10	Kg	39/35	47/42		
Volume	l	350	450		
Diameter	mm	860	860		
Depth	mm	602	720		
<b>GENERAL DETAILS</b>					
Washing speed / Spining speed	r.p.m.	42,5/966	42,5/966		
G Factor	-	450	450		
Maximum force transmitted	KN	7,36 ±2,45	7,36 ±2,45		
Frequency-dynamic force	Hz	14,3	14,3		
Sound level	dB	<70	<70		
Coin laundry version	-	Yes	No		
Double drain	-	Opt.	Opt.		
Weighing System / Tilting System	-	Opt./No	Opt./No		
SLUIICE option	-	No	No		
<b>DOOR</b>					
Height center door / Height door	mm	885/540	885/540		
Diameter	mm	560	560		
<b>POWER</b>					
Motor	kW	6	6		
Electric heating power	kW	21	21		
Total electric power (electric model)	kW	22	22		
Total electric power (hw, steam model)	kW	6	6		
<b>CONNECTIONS</b>		<b>ELECTRIC</b>	<b>STEAM/HOT WATER</b>	<b>ELECTRIC</b>	<b>STEAM/HOT WATER</b>
Tension 230V - III + T	N° x mm2 / A	3x16+T / 63A	3x4+T / 32A	3x16+T / 63A	3x4+T / 32A
Tension 400V - III + N + T	N° x mm2 / A	4x6+T / 40A	4x1,5+T / 16A	4x6+T / 40A	4x1,5+T / 16A
Steam inlet (Steam mod.)	inch	3/4"		3/4"	
Maximum steam consumption (Steam mod.)	Kg/h	18		18	
Water inlet	inch	3/4"		3/4"	
Water main pressure	Kg/cm <sup>2</sup>	2-4		2-4	
Maximum water consumption	Lit/h	261,3*		335,9*	
Drain	mm/inch	3"		3"	
Drainage capacity	Lit/min	200		200	
<b>DIMENSIONS / PACKING DIMENSIONS</b>					
Net Width / Gross Width	mm	1.095/1.205		1.095/1.205	
Net Depth / Gross Depth	mm	1.184/1.330		1.304/1.440	
Net Height / Gross Height	mm	1.730/1.850		1.730/1.850	
Net weight / Gross weight	Kg	735/786		747/853	
Volume	m <sup>3</sup>	2,7		3,3	

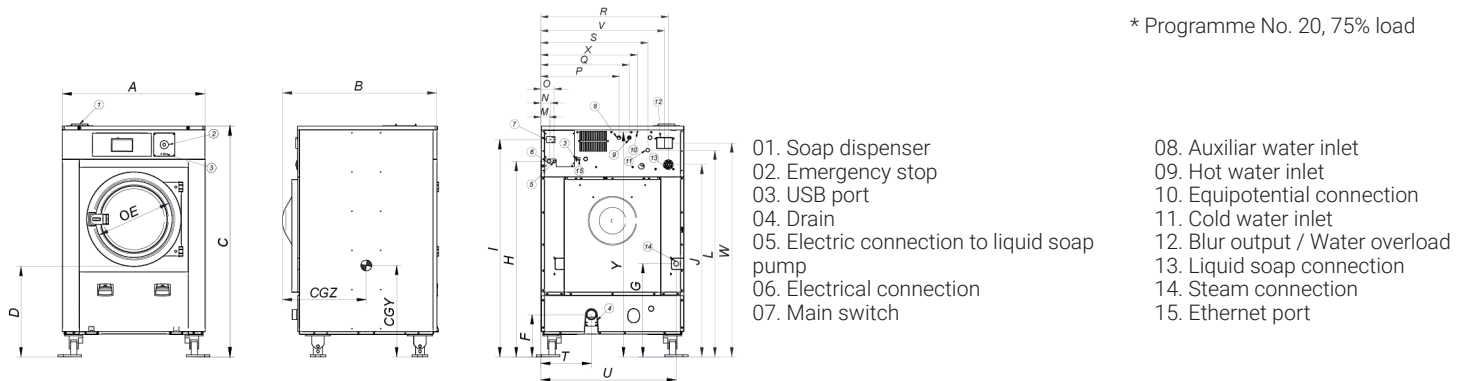

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ	
LA-35C	mm	1.095	1.184	1.730	525	560	158	576	1.330	1.498	1.331	1.513	1.417	61	74	101	596	676	976	808	384	1.028	946	1.496	740	1.558	795	732
LA-45C	mm	1.095	1.304	1.730	525	560	158	576	1.330	1.498	1.331	1.513	1.417	61	74	101	596	676	976	808	384	1.028	946	1.496	740	1.558	795	800